


Testomat ECO®

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

The **Testomat ECO®** determines water hardness fully automatically via titration.

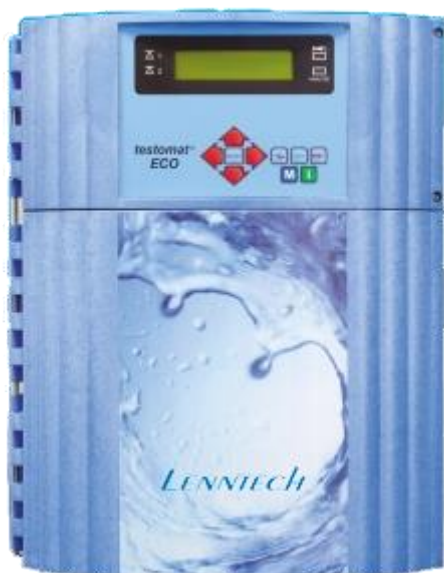

It is ideal as a cost-effective alternative to **Testomat 2000®** for monitoring and controlling the water quality of water treatment, blending and drinking-water plants.

Application

- water treatment plants
- drinking water plants

Measuring range

Water hardness 0.05-25 °dH
(depending on the choice of the indicator)

Technical Data

Power supply: 230-240 VAC, 115 VAC, 24 VAC all 50-60Hz

Power consumption: max. 30 VA

Protection class: I

Degree of protection: IP 65

Ambient temperature: 10-45 °C, 50 - 104°F

Option: booster pump see accessories

Dimensions (B x H x T): 380 x 480 x 280 mm

Weight: approx. 9 kg

Menu languages: German, English, French, Italian, Polish, Dutch, Spanish (others upon request)

Mains water supply

Operating pressure:

1 to 8 bar (15 to 116 psi) or

0,3 to 1 bar (5 to 15 psi), after removing of the valve body out of the regulator/filter housing

Water inlet: Opaque hose with 6 mm external diameter/4 mm internal diameter

Water outlet: Hose with 6 mm external diameter/4 mm internal diameter

Water temperature: 10 to 40 °C; 50 to 104°F