



PRODUCT SPECIFICATION


4040 UF TurboClean® Element For Dialysis and High-Purity Applications

Model	Permeate Flow*	Nominal M.W.C.O.
TurboClean® HP 4040-UF-F	3,100 GPD (11.7 m ³ /d)	10,000

* Performance shown is based on the following test conditions: 500 ppm PEG, 30 psi, 77°F (25°C), 15% recovery, pH 8.0, 30 minutes operation. Individual element permeate flow may vary +/- 15%.

OPERATIONAL AND DESIGN DATA

Membrane Type	AUM Advanced Ultrafiltration Membrane
Configuration	Spiral Wound, Sanitary Style Element
Active Membrane Area	78 ft ² (7.2 m ²)
Typical Applied Pressure	25 - 100 psi (2 - 7 bar)
Maximum Applied Pressure	600 psi (41 bar)
Maximum Operating Temperature	113°F (45°C)
Feed pH Range	2 - 11 continuous
Chlorine Tolerance	10 ppm
Maximum Feed Flow	20 GPM (4.5 m ³ /hr)
Maximum Pressure Drop	15 psi (1 bar) per element; 60 psi (4 bar) across housing
Maximum Feed SDI (15 minutes)	5.0
Maximum Feed Turbidity	1 NTU
Application	High Purity Water
Part Number	167070441
Replaces Model(s)	4040-N6P3X4

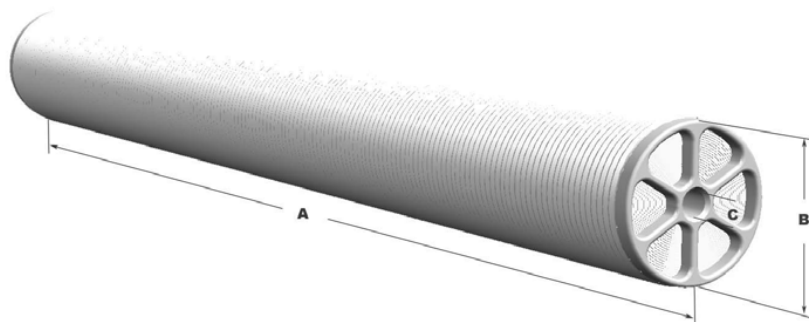

Element Weight: 15 lbs. (7 kg)

Length (A): 40.0" (1,016 mm)

Diameter (B): 4.0" (101 mm)

Permeate Tube (C): 0.62" (15.9 mm)

Permeate Tube: Desal Style tube

Feed Spacer: 0.031" thick diamond spacer



**Engineered Membrane
SOLUTIONS**

LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289