



PRODUCT SPECIFICATION


4040 UF TurboClean® Element For Dialysis and High-Purity Applications

Model	Permeate Flow*	Nominal M.W.C.O.
TurboClean® HP 4040-UF-M	3,000 GPD (11.7 m ³ /d)	10,000

* Performance shown is based on the following test conditions: 500 ppm PEG, 30 psi, 77 °F (25 °C), 15% recovery, pH 8.0, 30 minutes operation. Individual element permeate flow may vary +25%/-15%.

OPERATIONAL AND DESIGN DATA

Membrane Type	AUM Advanced Ultrafiltration Membrane
Configuration	Spiral Wound, Sanitary Style Element
Active Membrane Area	75 ft ² (7.0 m ²)
Typical Applied Pressure	25 - 100 psi (2 - 7 bar)
Maximum Applied Pressure	600 psi (41 bar)
Maximum Operating Temperature	113 °F (45 °C)
Feed pH Range	2 - 11 continuous
Chlorine Tolerance	10 ppm
Maximum Feed Flow	20 GPM (4.5 m ³ /hr)
Maximum Pressure Drop	15 psi (1 bar) per element; 60 psi (4 bar) across housing
Maximum Feed SDI (15 minutes)	5.0
Maximum Feed Turbidity	1 NTU
Application	High Purity Water

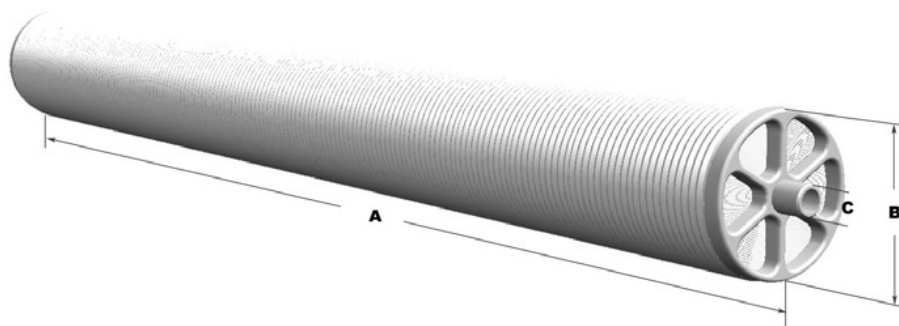

Element Weight:	15 lbs. (7 kg)		
Length (A):	40.0" (1,016 mm)	Diameter (B):	4.0" (101 mm)
Permeate Tube:	"Male" design	Permeate Tube (C):	0.75" (19.1mm)
Feed Spacer:	0.031" thick diamond spacer		



**Engineered Membrane
SOLUTIONS**

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289