


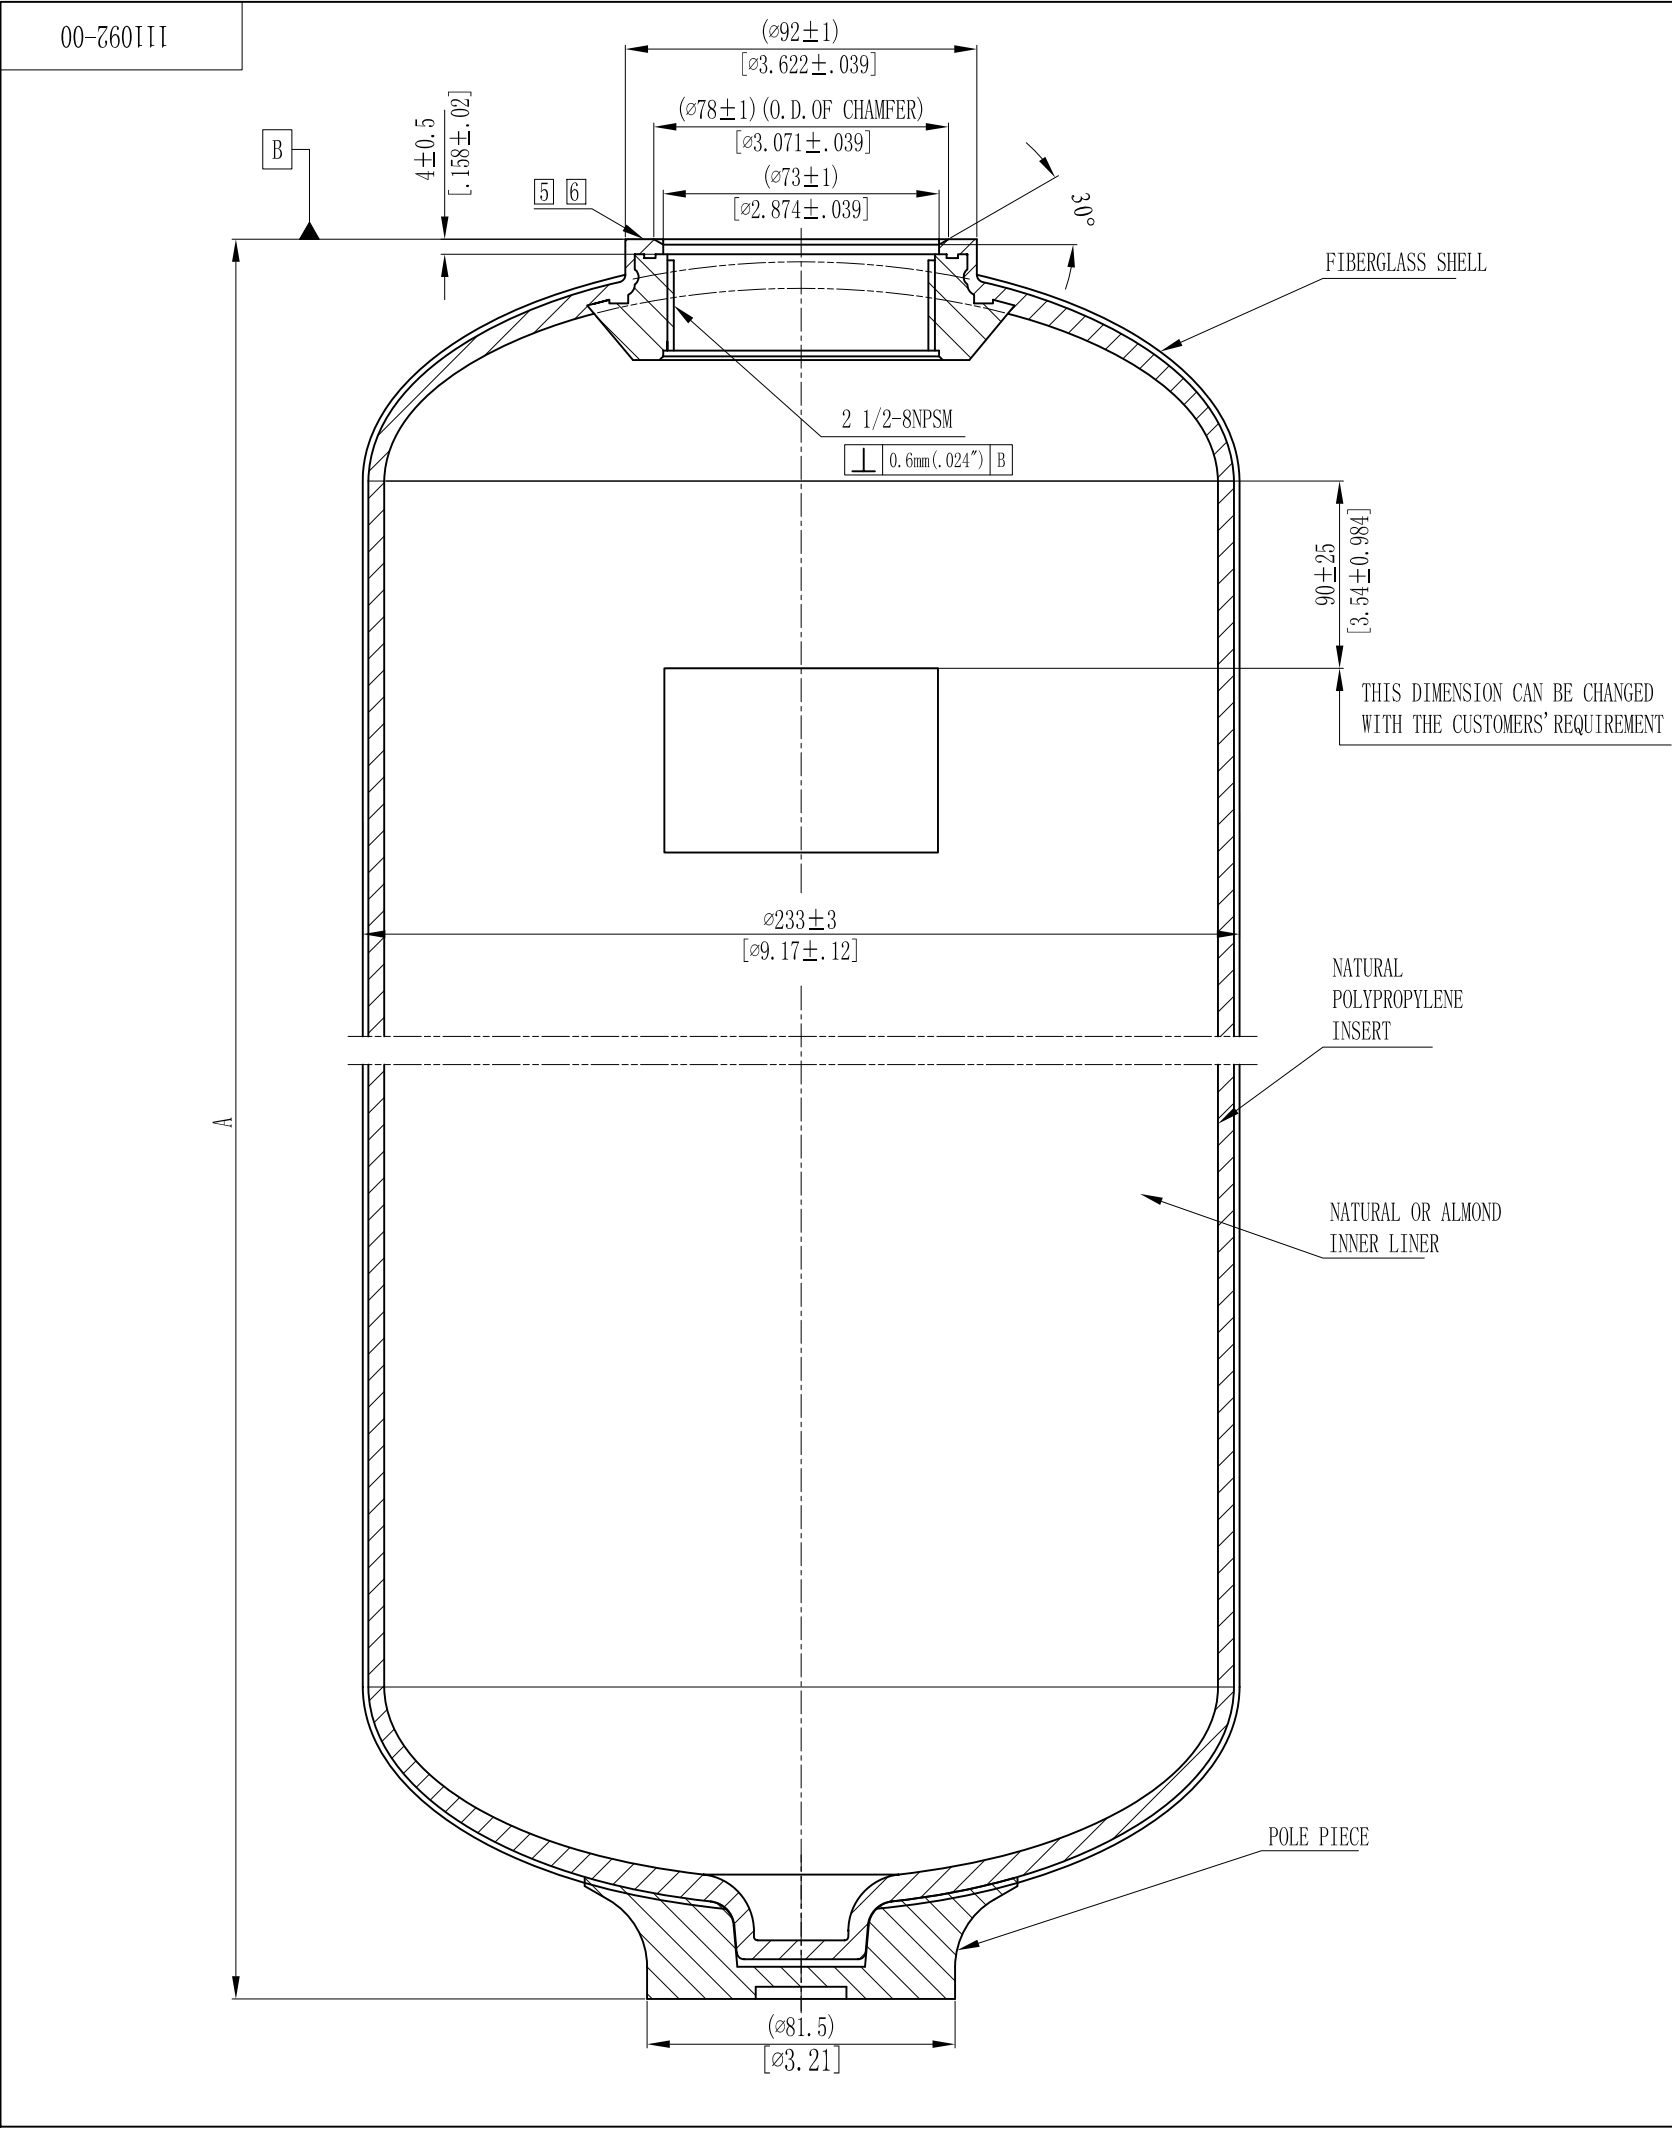

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		Liters	U. S. GAL	CUBIC FT	Liters	U. S. GAL	CUBIC FT	Kg	LBS
			mm	inch								
9x17	430	16.93	4	.16	13.7	3.62	0.48	1.30	0.34	0.05	1.80	3.96
9x30	762	30.0	4	.16	26.6	7.03	0.94	1.30	0.34	0.05	3.20	7.04
9x35	890	35.04	4	.16	31.6	8.35	1.12	1.30	0.34	0.05	3.75	8.25
9x18	457	17.99	4	.16	14.7	3.88	0.52	1.30	0.34	0.05	1.92	4.22
9x40	1016	40.0	5	.20	36.3	9.59	1.28	1.30	0.34	0.05	4.35	9.57
9x24	605	23.82	4	.16	20.4	5.39	0.72	1.30	0.34	0.05	2.56	5.63
9x42	1067	42.01	5	.20	38.2	10.09	1.35	1.30	0.34	0.05	4.56	10.03
9x48	1226	48.27	4	.16	45.1	11.92	1.59	1.30	0.34	0.05	5.66	12.45
9x13(b)	328	12.91	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	10.0	2.64	0.35	1.30	0.34	0.05	1.71	3.76
9x16(b)	406	15.98	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	13.1	3.46	0.46	1.30	0.34	0.05	2.17	4.77
9x18(b)	470	18.50	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	15.5	4.10	0.55	1.30	0.34	0.05	2.26	4.97
9x22(b)	559	22.01	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	19.0	5.02	0.67	1.30	0.34	0.05	2.40	5.28
9x24(b)	605	23.82	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	20.4	5.39	0.72	1.30	0.34	0.05	2.56	5.63
9x32(b)	813	32.01	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	28.9	7.63	1.02	1.30	0.34	0.05	3.71	8.16
9x35(b)	890	35.04	$\begin{smallmatrix} +4 \\ -2 \end{smallmatrix}$	$\begin{smallmatrix} +0.16 \\ -0.08 \end{smallmatrix}$	31.6	8.35	1.12	1.30	0.34	0.05	3.75	8.25

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - SURFACE FINISH.
 - DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

REMARK:
BELGIAN CUSTOMERS PLEASE SEE THE DATA MARKED (b);

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

5	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION					2009/07/28
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):						
SIGNATURE			 WAVE CYBER (SHANGHAI) CO., LTD.			
	NAME	DATE				
DESIGN			SCALE	MATERIAL	MODEL	
INSPECTION			1 : 2		DESCRIPTION	
APPROVAL			QUANTITY	SMOOTHNESS	9"FRP PRESSURE VESSEL (POLE PIECE)	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.
					111092-00	5
DO NOT MEASURE THE DIMENSIONS.				UNIT: MM		TOTAL PAGE: 1