
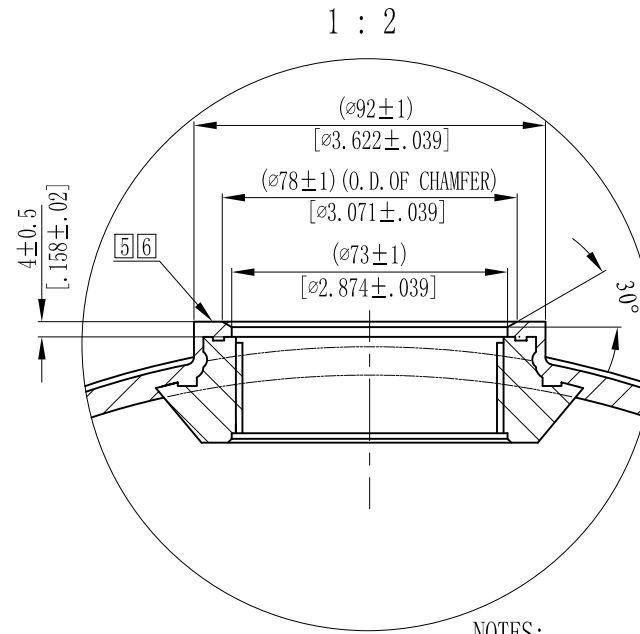


00-121111

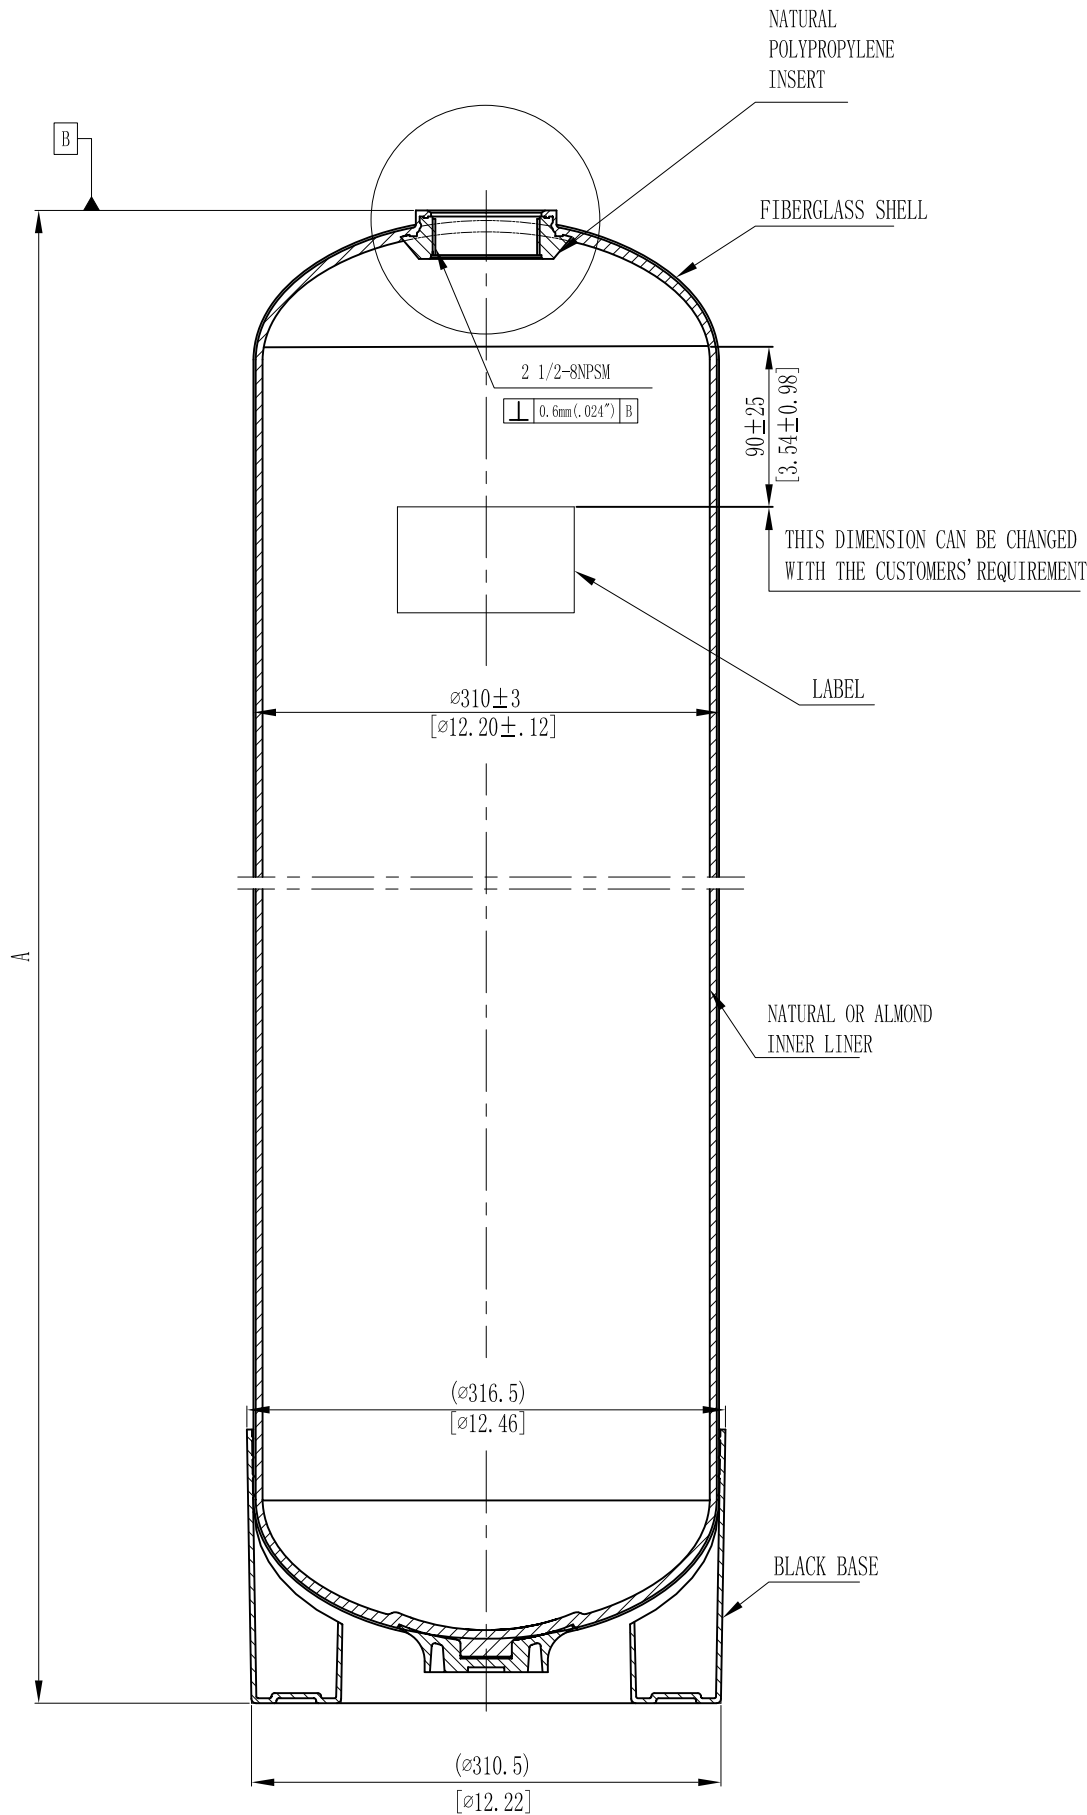

NOTES:

- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
- 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- [5] . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- [6] . SURFACE FINISH.
- 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

4		THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION					2009/09/08			
VERSION NO.		DESCRIPTION OF CHANGES:				SIGNATURE		DATE		
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):										
SIGNATURE			 WAVE CYBER (SHANGHAI) CO., LTD.							
	NAME	DATE								
DESIGN			SCALE		MATERIAL		MODEL			
			1 : 5				DESCRIPTION			
INSPECTION							12" FRP PRESSURE VESSEL			
APPROVAL			QUANTITY		SMOOTHNESS					
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION		COMPUTER CODE		DRAWING NO.		VERSION NO.	
							111121-00		4	
			DO NOT MEASURE THE DIMENSIONS.		UNIT: MM		TOTAL PAGE: 1			