


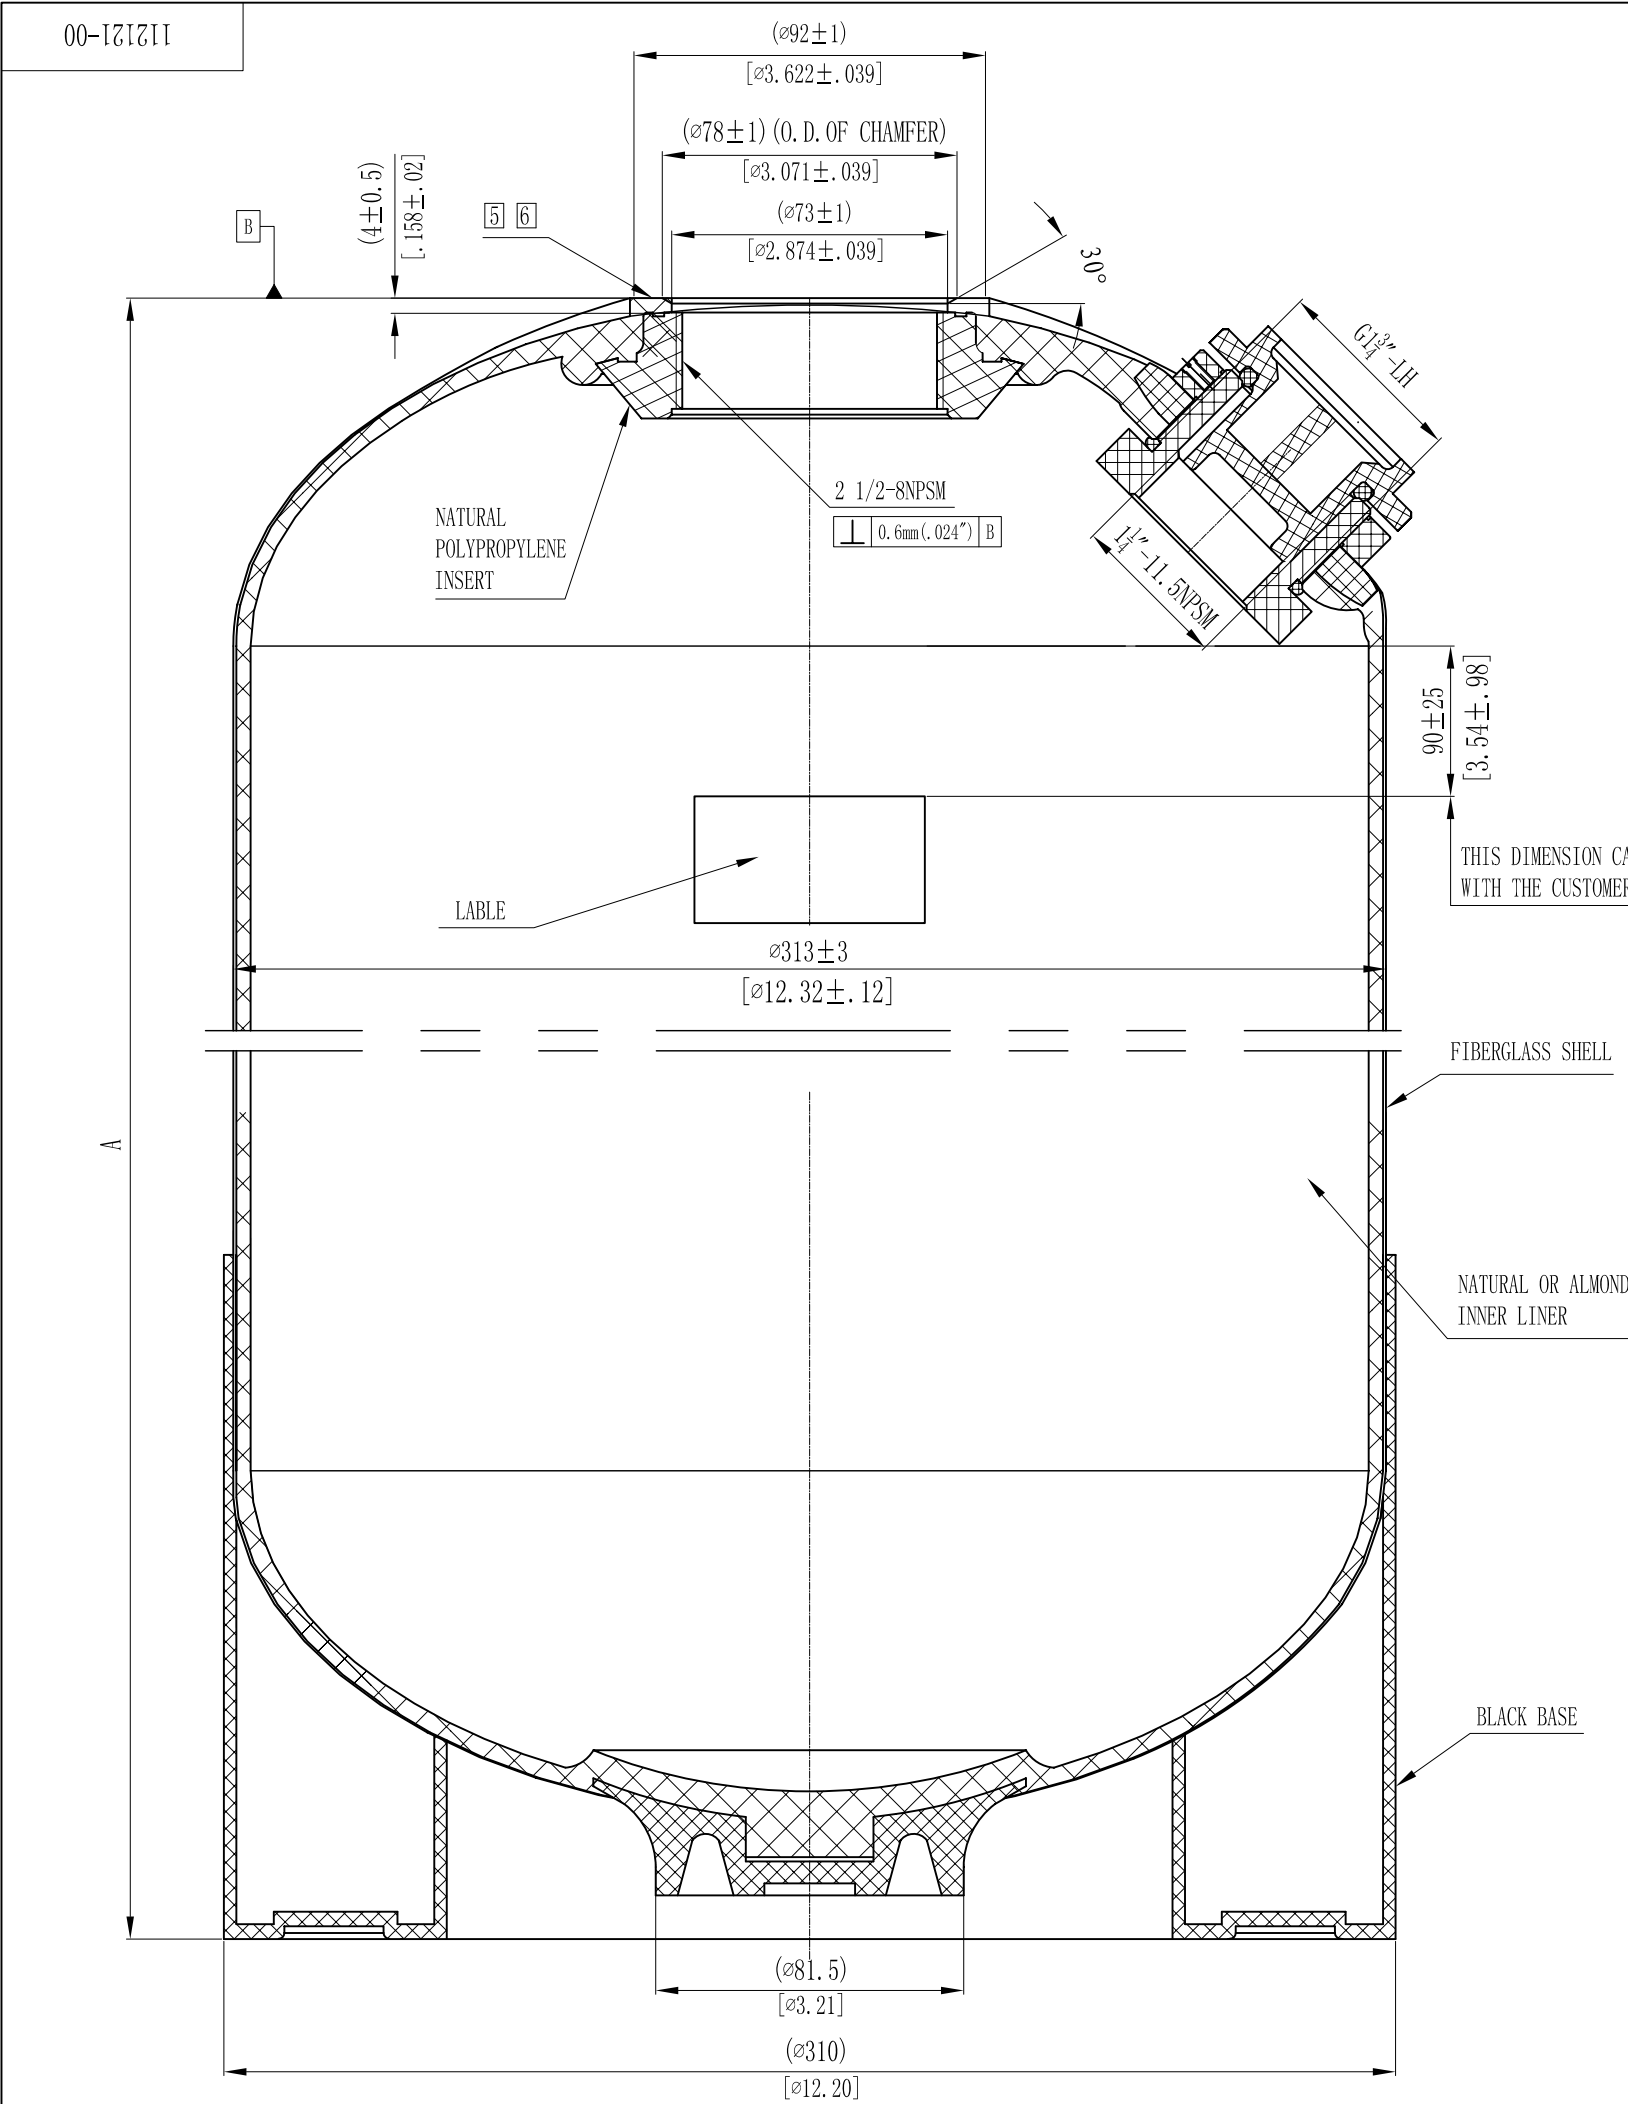

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
			mm	inch								
12x48	1238	48.74	6	0.24	79.5	21.00	2.81	3.87	1.02	0.14	12.10	26.6
12x52	1344	52.91	6	0.24	87.3	23.06	3.08	3.87	1.02	0.14	12.75	28.1
12x36	932	36.69	6	0.24	55.6	14.69	1.96	3.87	1.02	0.14	8.92	19.6

DOME HOLE POSITION:
POSITION A. FOR THE FOLLOWING VALVES:
FLECK 2510, 5600, 6600, 6700, 56SE
AUTOTROL 255/440, 263/440
POSITION B.
CLACK

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.3BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - SURFACE FINISH.
 - DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

2		ADD SPEC 12*36				2009/09/08			
VERSION NO.		DESCRIPTION OF CHANGES:				SIGNATURE		DATE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			WAVE CYBER (SHANGHAI) CO., LTD.						
SIGNATURE									
	NAME	DATE							
DESIGN			SCALE		MATERIAL		MODEL		
INSPECTION			1 : 2				DESCRIPTION		
APPROVAL			QUANTITY		SMOOTHNESS		12"FRP PRESSURE VESSEL (DOME HOLE)		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION		COMPUTER CODE		DRAWING NO.		VERSION NO.
							112121-00		2
			DO NOT MEASURE THE DIMENSIONS.		UNIT: MM		TOTAL PAGE: 1		