
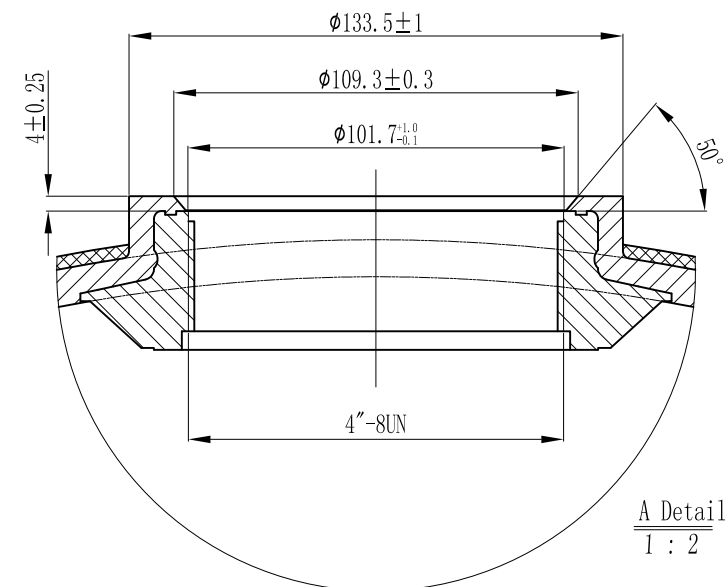
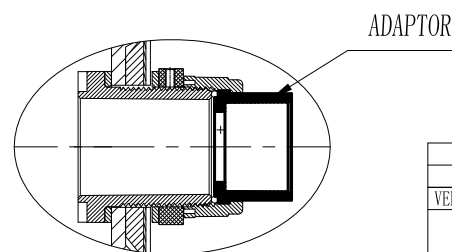


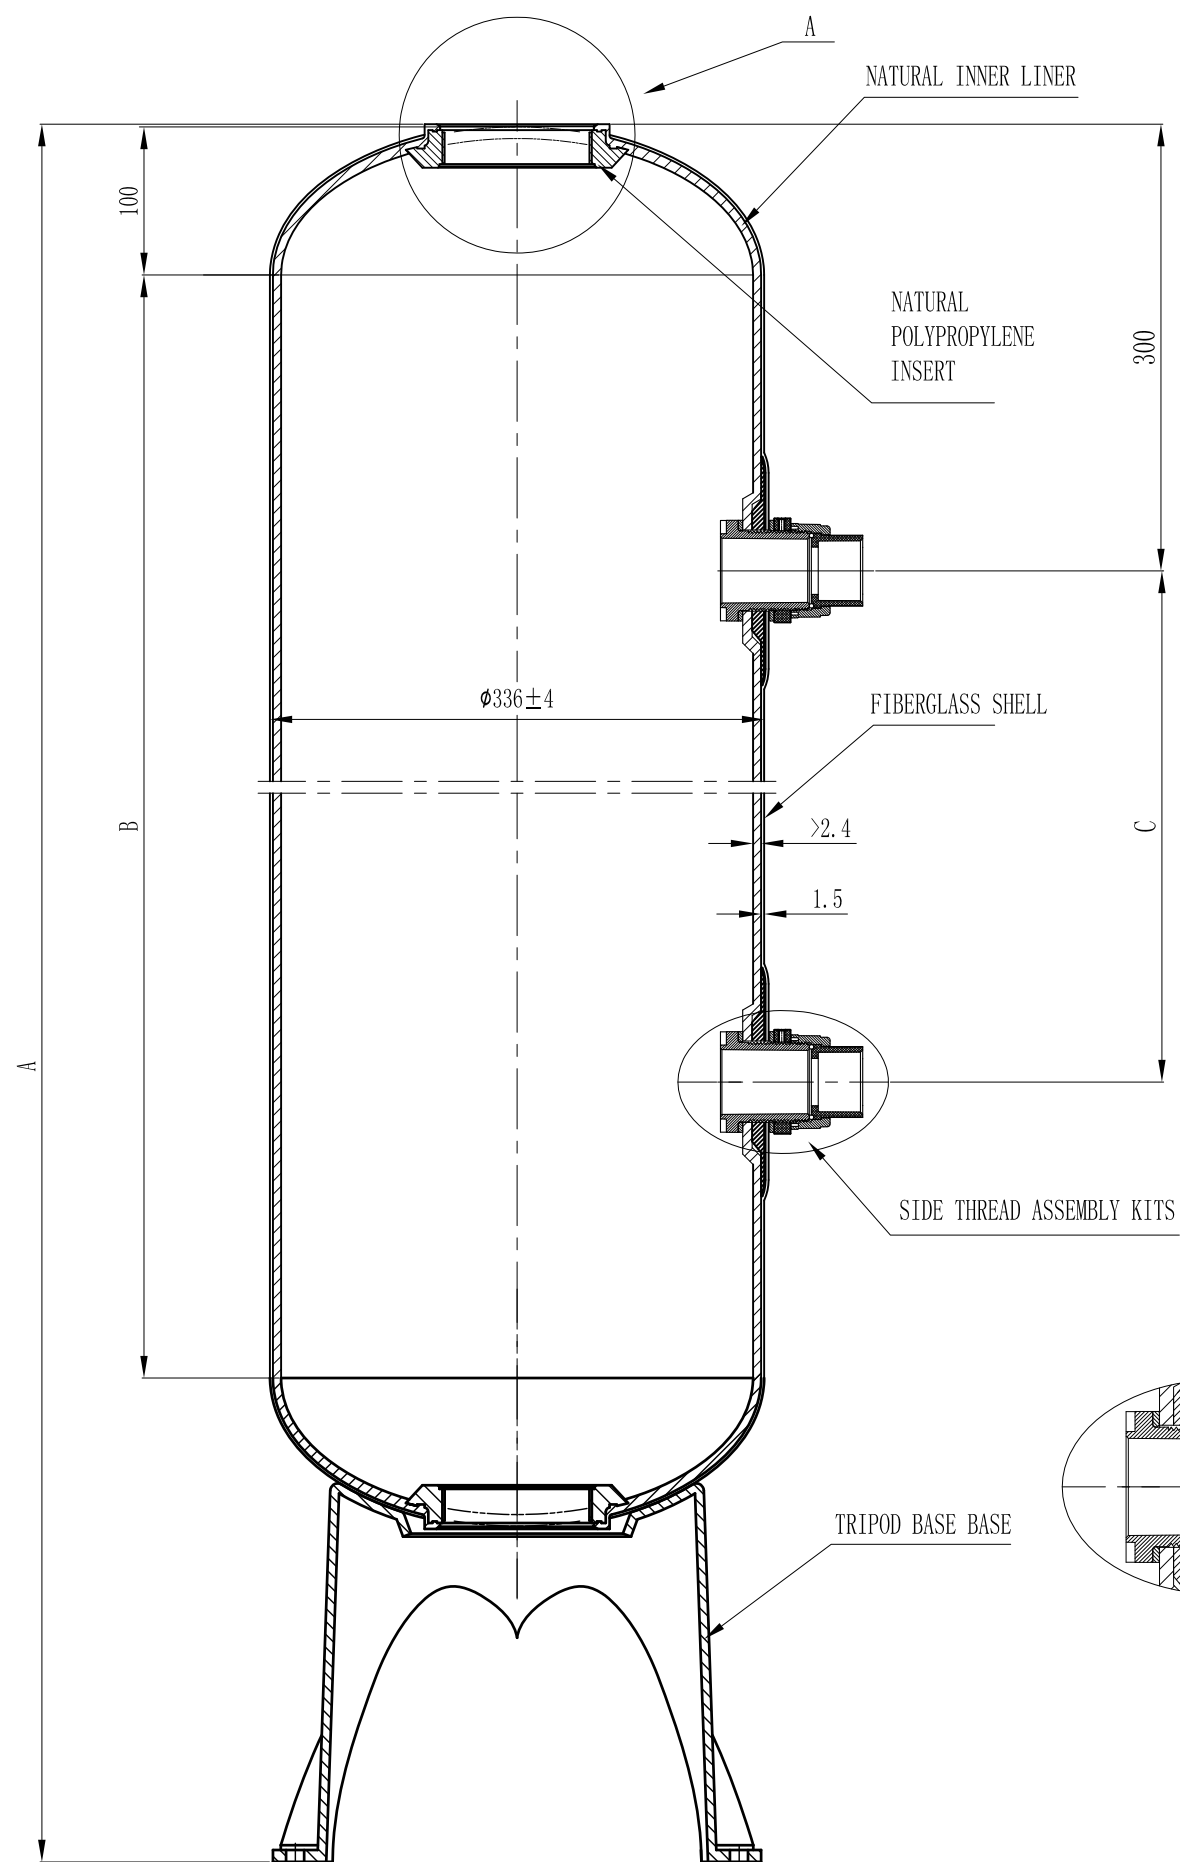

MODEL	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
13×54	1527±6	1136	736	105.7L	12.23	1.43 m ²

NOTE:

- TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
- MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1°C-49°C; NOT APPLICABLE TO CORROSIVE LIQUID;
- DIMENSIONAL TOLERANCE:SJ1372-78, GRADE 8.
- TANK IS SUPPLIED WITH ADAPTOR:

1.5"NPT MALE ADAPTOR / 1¼" SOCKET ADAPTOR

1.5"BSP MALE ADAPTOR / 40mm SOCKET ADAPTOR

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

VERSION NO.		DESCRIPTION OF CHANGES:		SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):					
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.			
DESIGN	NAME	DATE	SCALE	MATERIAL	MODEL
INSPECTION					DESCRIPTION
APPROVAL			QUANTITY	WEIGHT	13"VESSEL (4"×4" inlet) (Threaded Side Inlets)
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.
					114134-00
			DO NOT MEASURE THE DIMENSIONS.	UNIT: MM	VERSION NO. 0
			TOTAL PAGE: 1		