



MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
			mm	inch								
13x35	911	35.87	6	.24	62.8	16.59	2.22	4.91	1.30	0.17	7.37	16.21
13x44	1140	44.88	6	.24	84.8	22.41	3.00	4.91	1.30	0.17	9.18	20.20
13x54	1393	54.84	6	.24	105.7	27.93	3.73	4.91	1.30	0.17	10.80	23.76

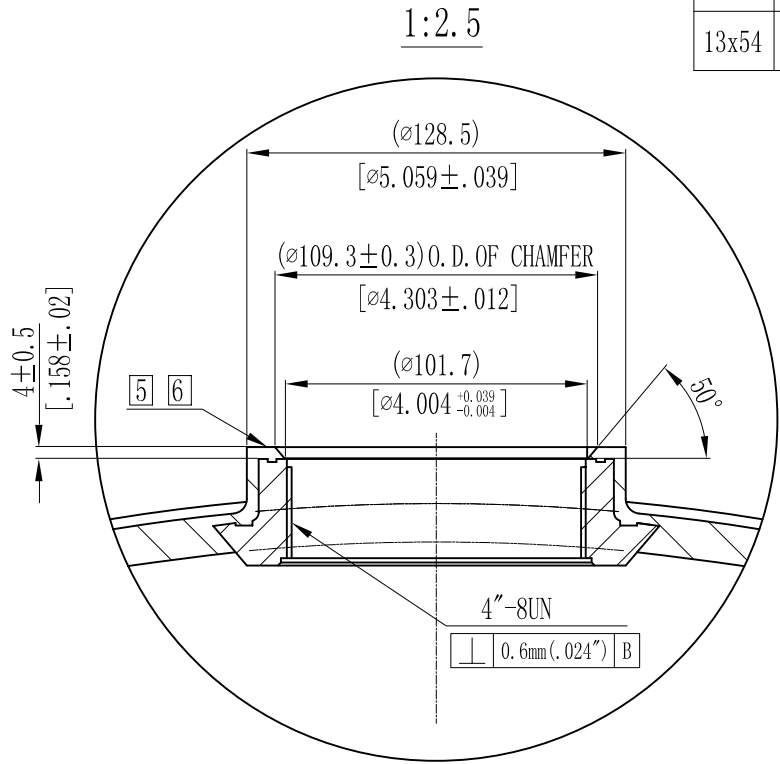

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5 BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- SURFACE FINISH.
- DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
- USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

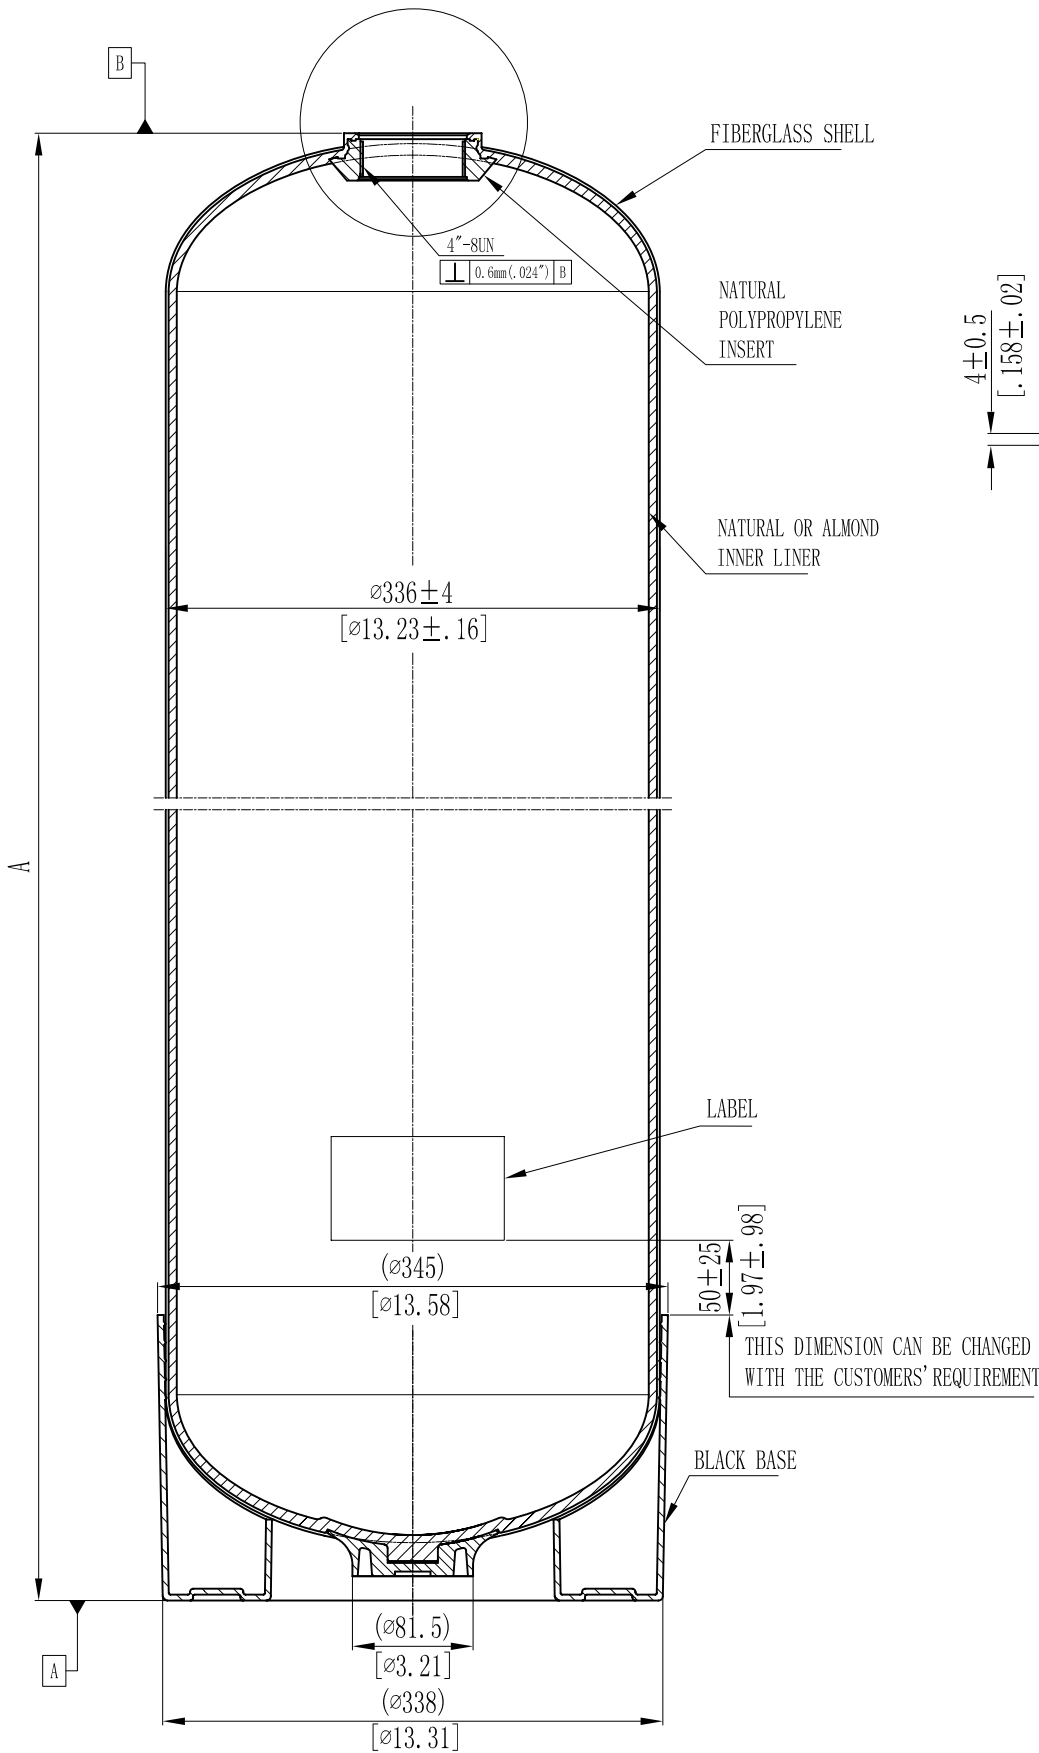

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

5		THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION		2010/12/14	
VERSION NO.		DESCRIPTION OF CHANGES:		SIGNATURE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):		SIGNATURE		DATE	
DESIGN		NAME		DATE	
INSPECTION		SCALE		MATERIAL	
APPROVAL		QUANTITY		SMOOTHNESS	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		PROJECTION		COMPUTER CODE	
		DO NOT MEASURE THE DIMENSIONS.		UNIT: MM	
				TOTAL PAGE: 1	