



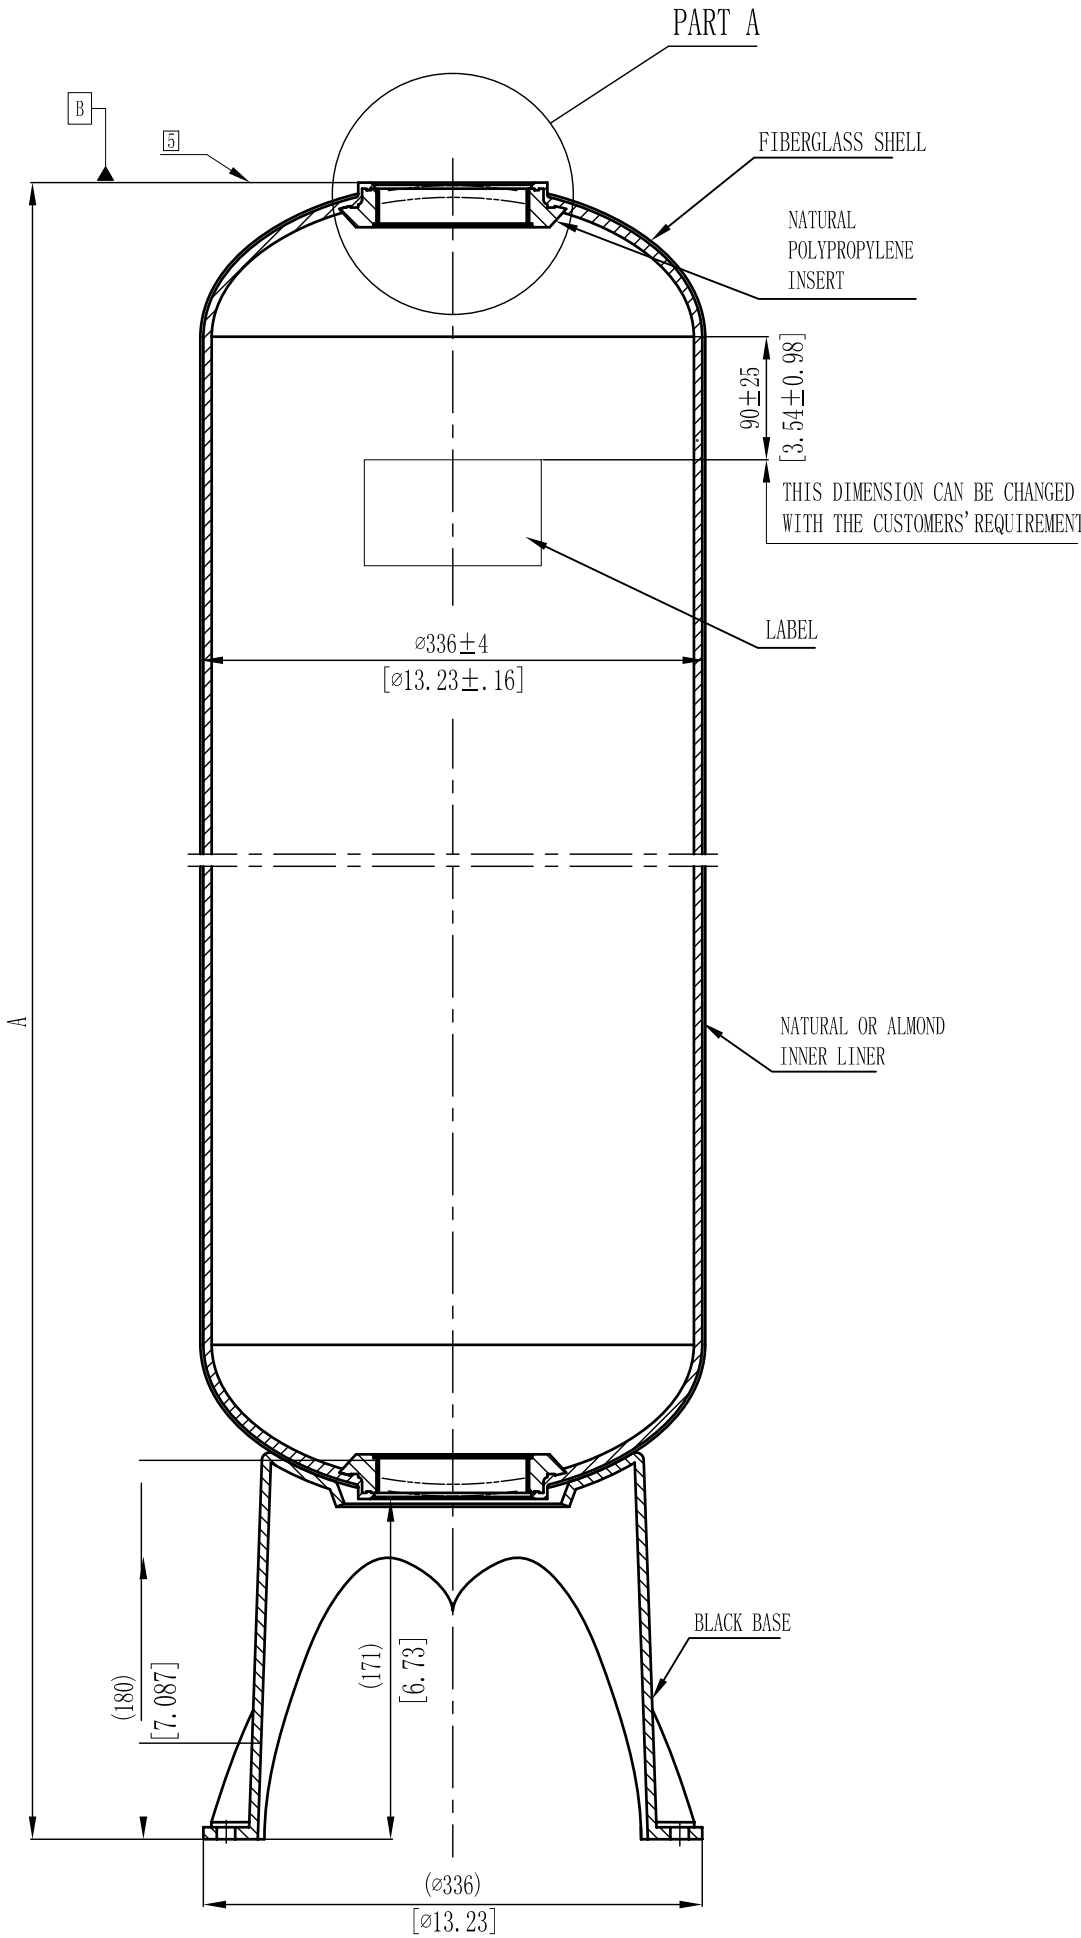

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
13x44	1274	50.16	6	.24	84.8L	22.40	3.00	4.91	1.30.	0.17	8.84	19.45
13x54	1527	60.12	6	.24	105.7L	27.93	3.73	4.91	1.30.	0.17	11.23	24.71

Part A 1:2

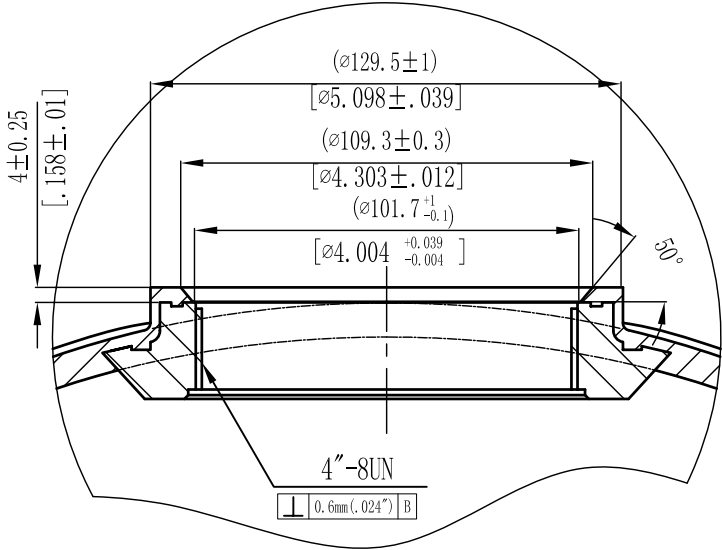

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 - USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

1	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION							2009/06/11
VERSION NO.	DESCRIPTION OF CHANGES:							SIGNATURE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):								
SIGNATURE				WAVE CYBER (SHANGHAI) CO., LTD.				
	NAME	DATE						
DESIGN			SCALE	MATERIAL	MODEL			
INSPECTION			1 : 5		DESCRIPTION 13" (4-4) FRP PRESSURE VESSEL (DOUBLE OPENING)			
APPROVAL			QUANTITY	SMOOTHNESS				
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.				PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.	
						111134-00	1	
DO NOT MEASURE THE DIMENSIONS.						UNIT: MM		TOTAL PAGE: 1