
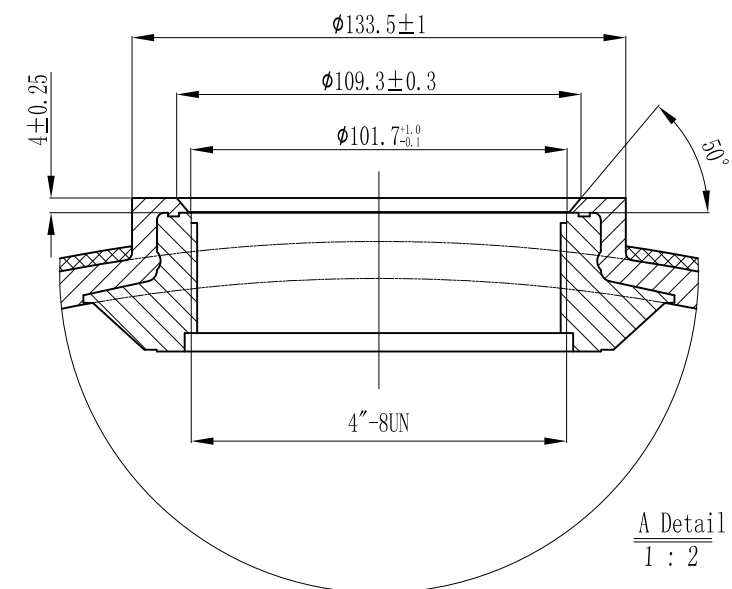
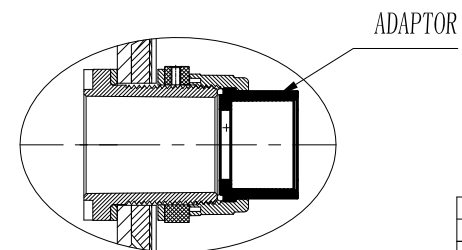


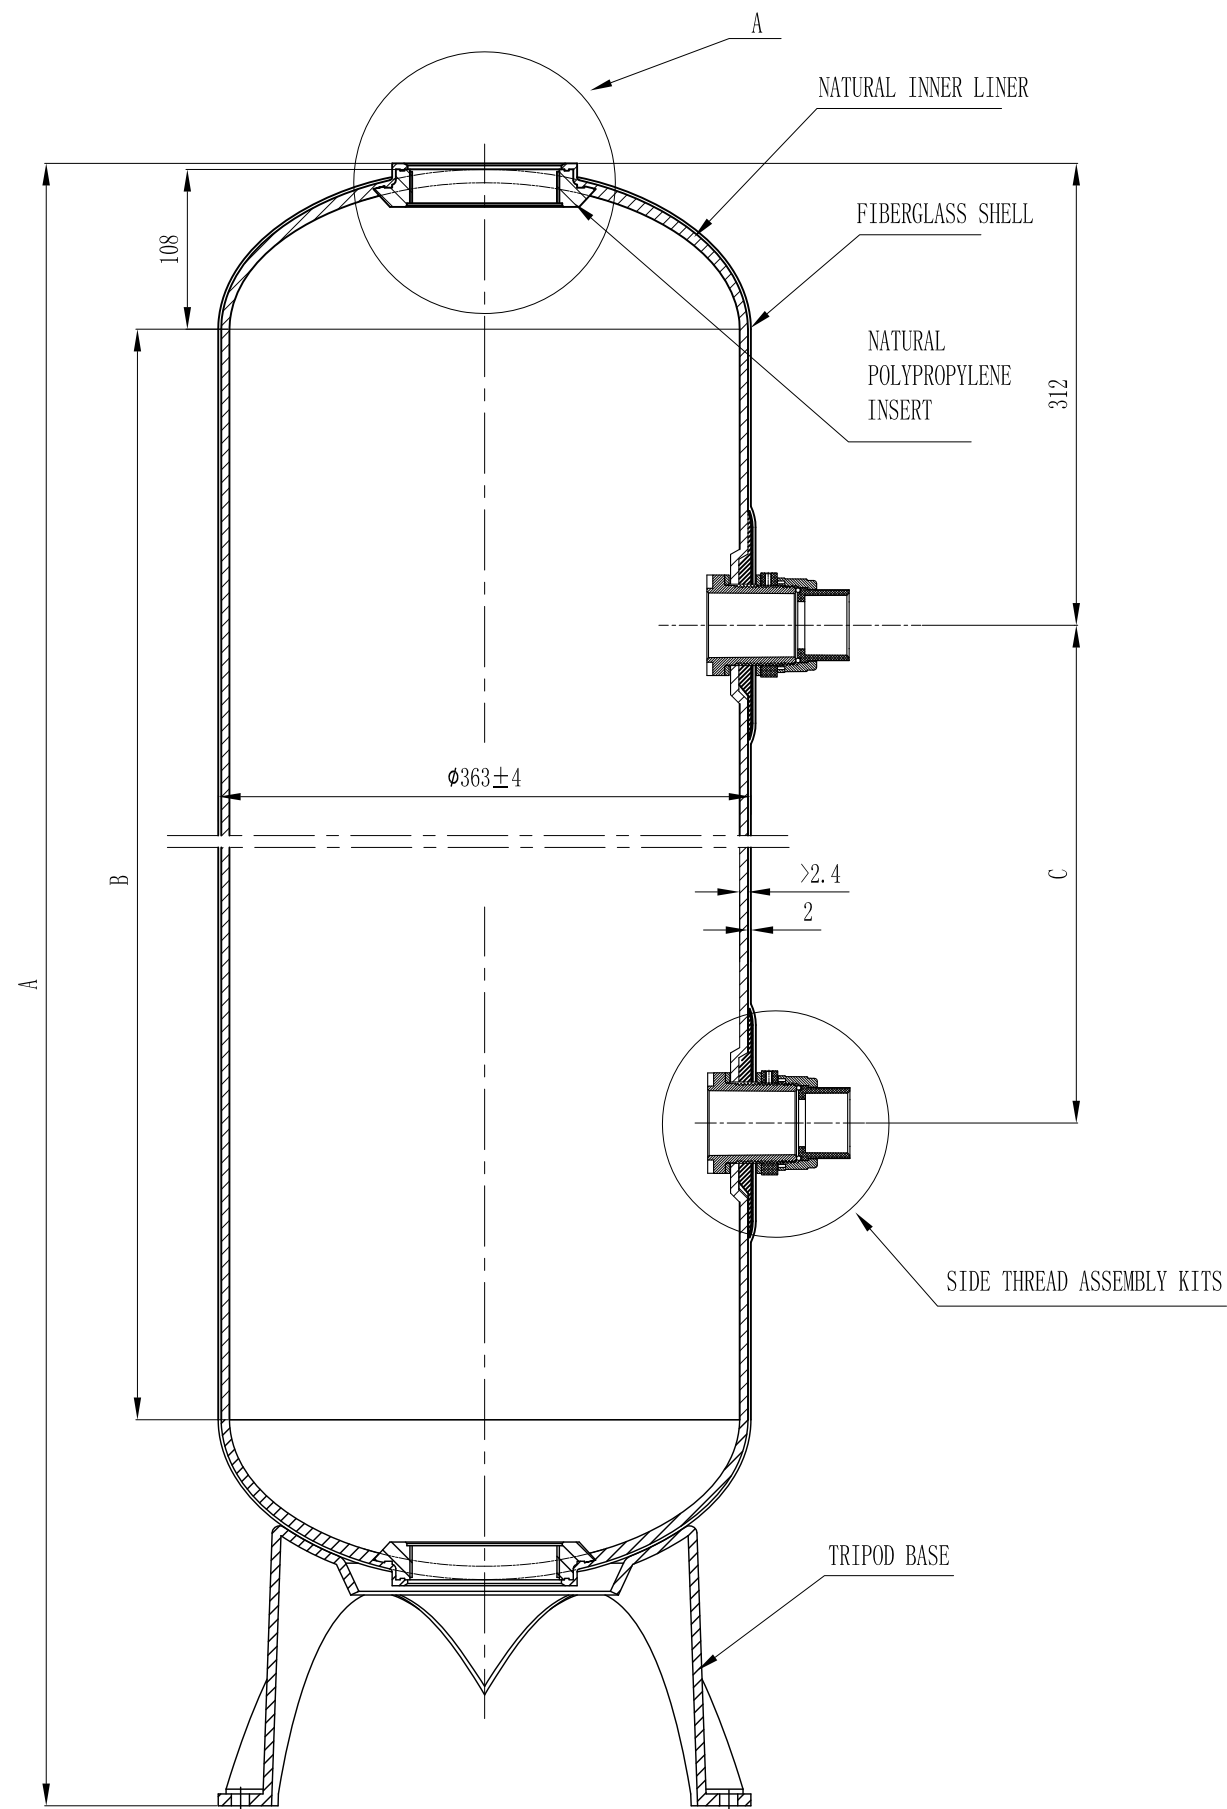

MODEL	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
14×65	1858 ± 6	1392.5	992	148L	16	1.82 m^2

NOTE:

1. TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
2. MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1°C-49°C; NOT APPLICABLE TO CORROSIVE LIQUID;
3. DIMENSIONAL TOLERANCE:SJ1372-78, GRADE 8.
4. TANK IS SUPPLIED WITH ADAPTOR:

1.5"NPT MALE ADAPTOR / 1¼" SOCKET ADAPTOR

1.5"BSP MALE ADAPTOR / 40mm SOCKET ADAPTOR

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			 WAVE CYBER (SHANGHAI) CO., LTD.			
SIGNATURE						
	NAME	DATE	SCALE	MATERIAL	MODEL	14"VESSEL (4"×4"inlet) (Threaded Side Inlets)
DESIGN					DESCRIPTION	
INSPECTION						
APPROVAL			QUANTITY	WEIGHT		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.
					114144-00	0
			DO NOT MEASURE THE DIMENSIONS.		UNIT: MM	TOTAL PAGE: 1