
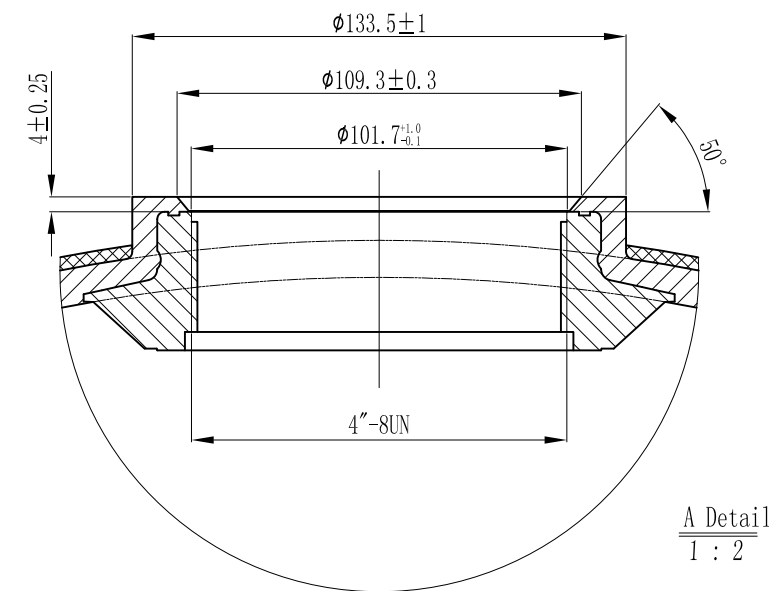


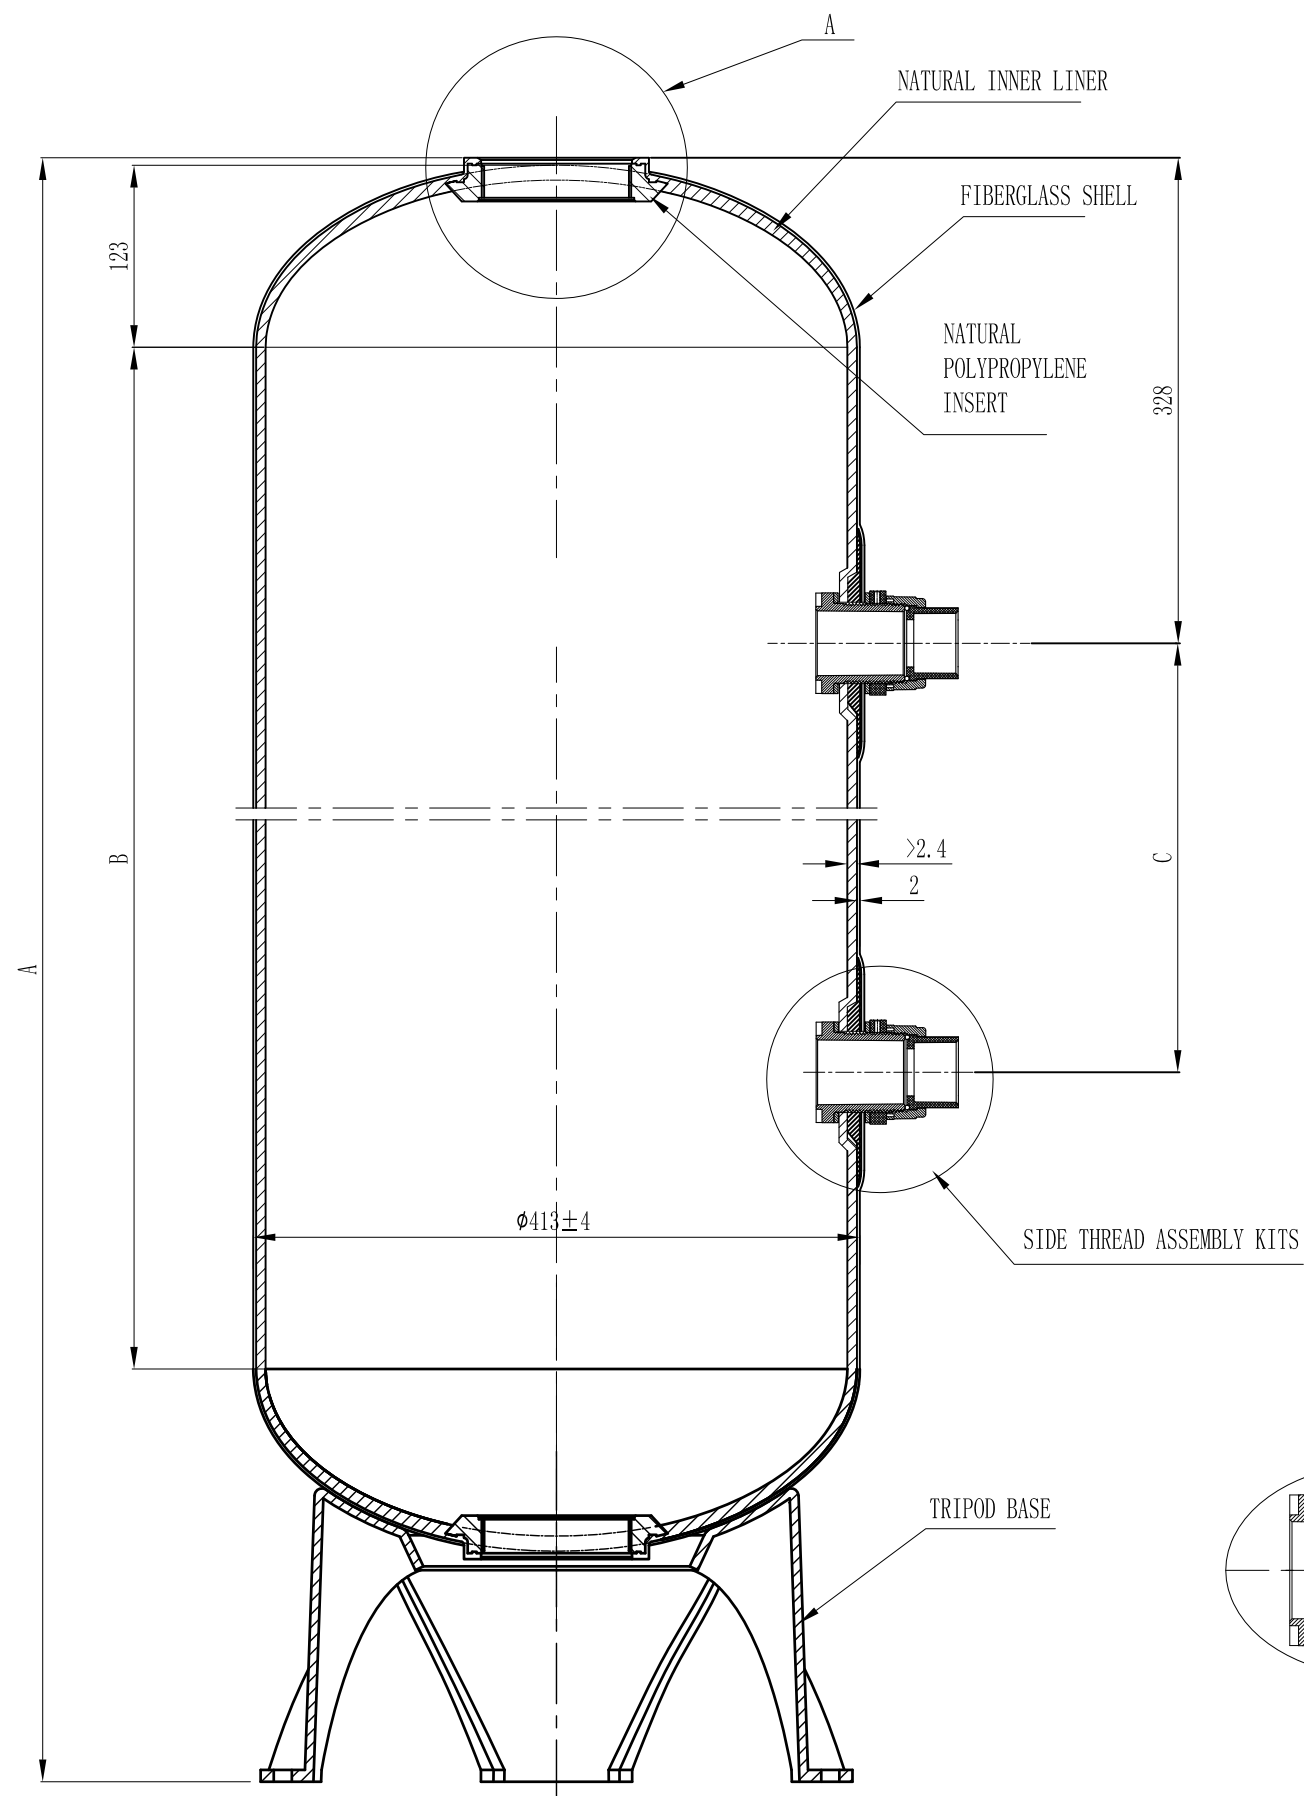

MODEL	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
16×65	1861±6	1362.5	962	194L	19.65	2.10 m ²

NOTE:

- TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
- MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1℃-49℃; NOT APPLICABLE TO CORROSIVE LIQUID;
- DIMENSIONAL TOLERANCE:SJ1372-78, GRADE 8.
- TANK IS SUPPLIED WITH ADAPTOR:


1.5"NPT MALE ADAPTOR / 1¼" SOCKET ADAPTOR

1.5"BSP MALE ADAPTOR / 40mm SOCKET ADAPTOR

LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

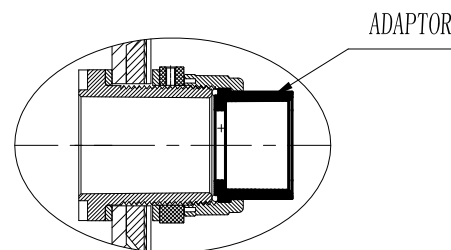

VERSION NO.		DESCRIPTION OF CHANGES:				SIGNATURE		DATE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY) :			 WAVE CYBER (SHANGHAI) CO., LTD.						
SIGNATURE									
	NAME		DATE		SCALE MATERIAL MODEL DESCRIPTION 16"VESSEL (4"×4"inlet) (Threaded Side Inlets)				
DESIGN									
INSPECTION									
APPROVAL					QUANTITY WEIGHT		DRAWING NO. 114164-00 VERSION NO. 0		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.				PROJECTION  COMPUTER CODE					
				DO NOT MEASURE THE DIMENSIONS.		UNIT: MM		TOTAL PAGE: 1	