
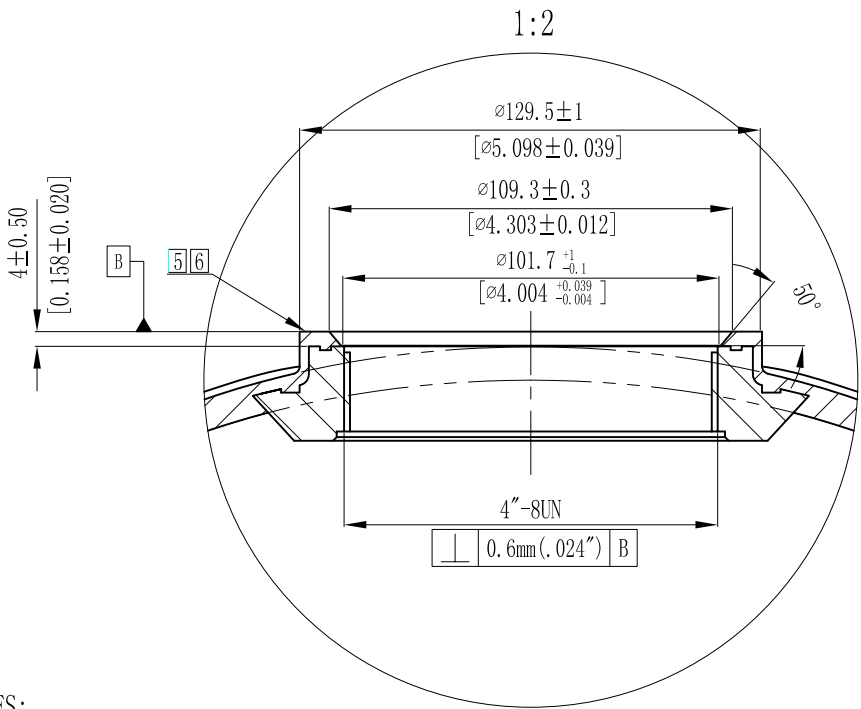


00-791911

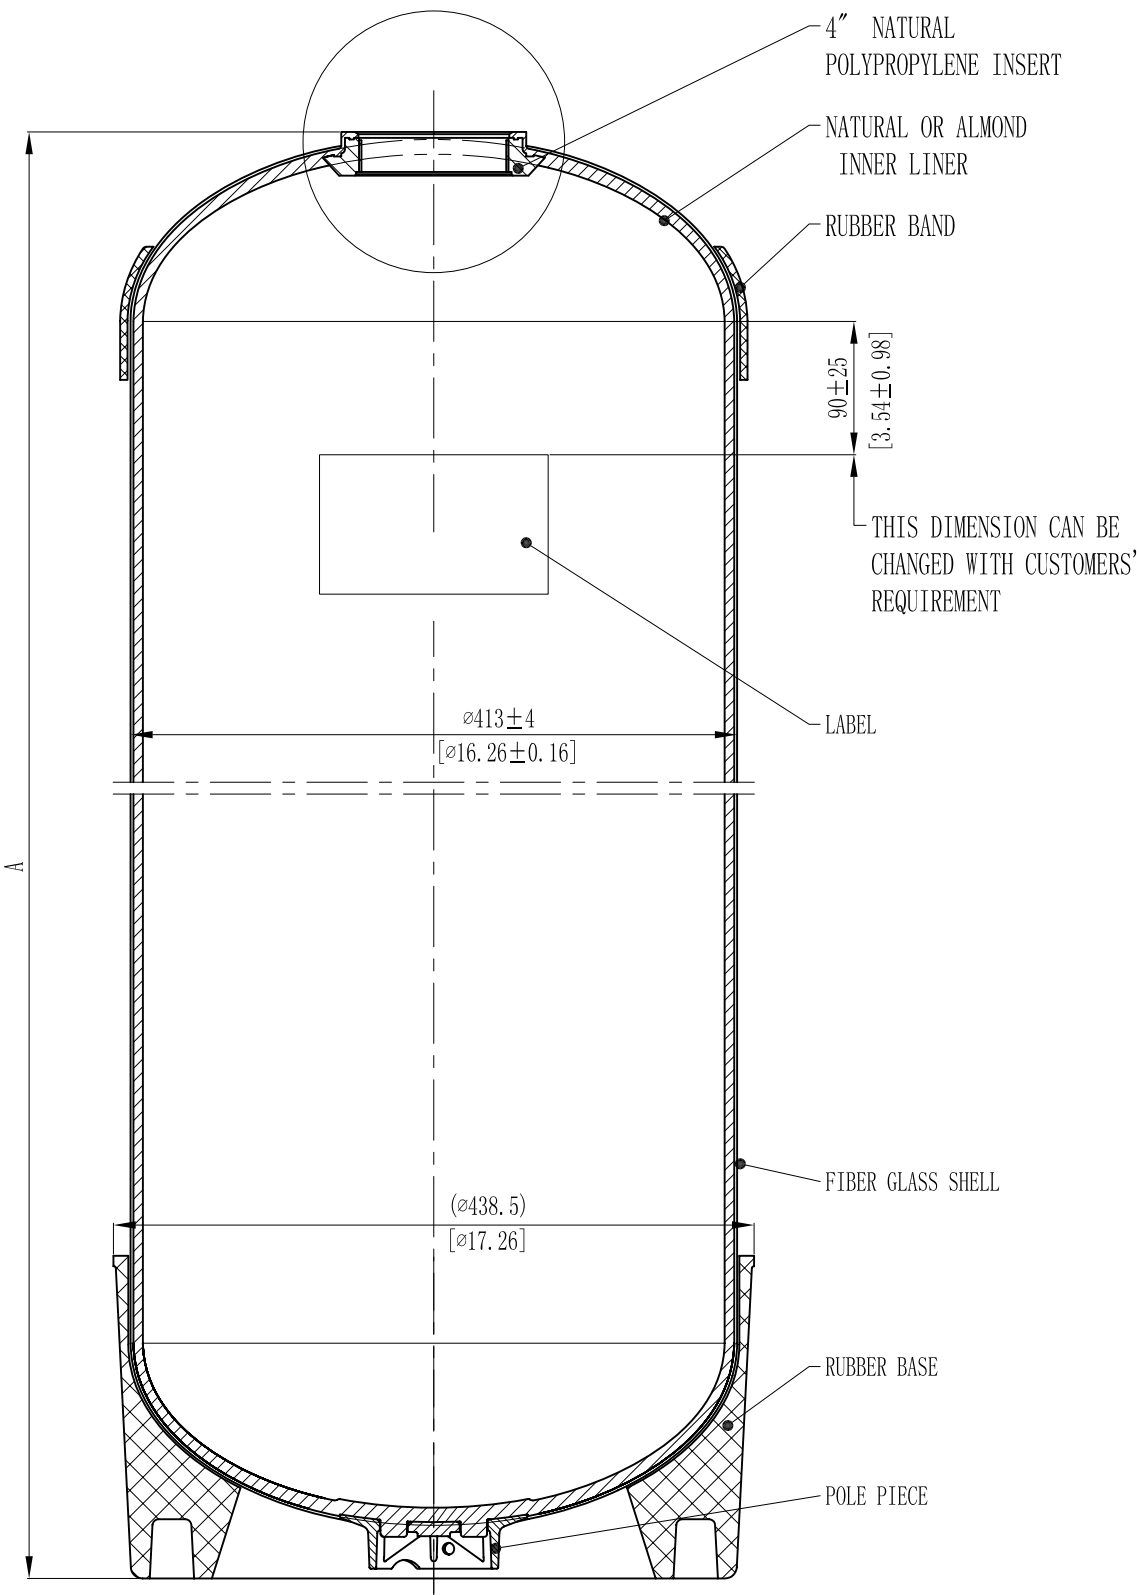

- NOTES:
- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - 6 . SURFACE FINISH.
 - 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

0		FIRST REVISION:									
VERSION NO.		DESCRIPTION OF CHANGES:				SIGNATURE		DATE			
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):											
SIGNATURE				WAVE CYBER (SHANGHAI) CO., LTD.							
NAME		DATE									
DESIGN				SCALE		MATERIAL		MODEL			
INSPECTION				1 : 5				DESCRIPTION			
APPROVAL				QUANTITY		SMOOTHNESS		16" (4" DI) FRP VESSEL (RUBBER BASE)			
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.				PROJECTION		COMPUTER CODE		DRAWING NO.		VERSION NO.	
								116162-00		0	
DO NOT MEASURE THE DIMENSIONS.						UNIT: MM			TOTAL PAGE: 1		