
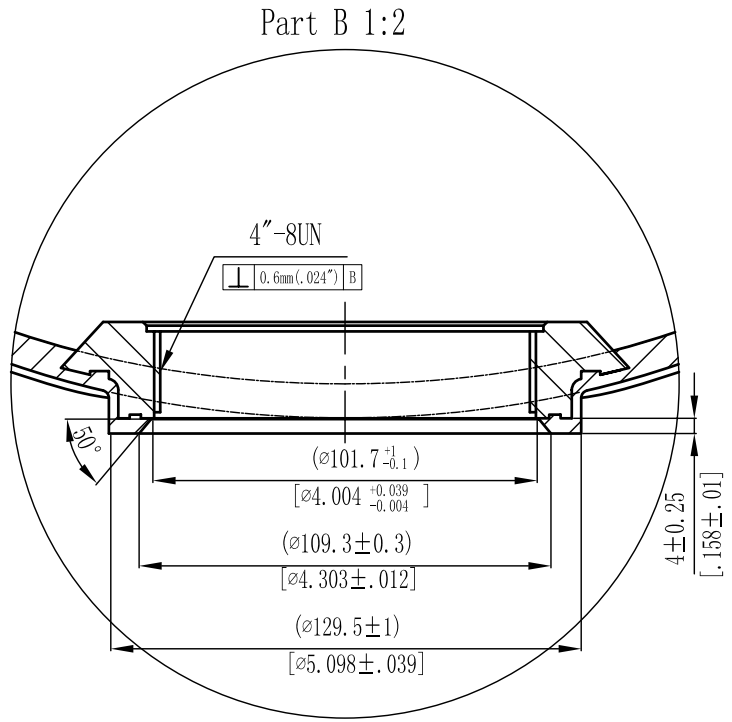


00-09IIII

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
16x52	1531	60.28	6	.24	153L	40.42	5.41	9.15	2.42	0.32	15.75	34.65
16x65	1861	73.27	6	.24	194L	51.25	6.86	9.15	2.42	0.32	18.65	41.03

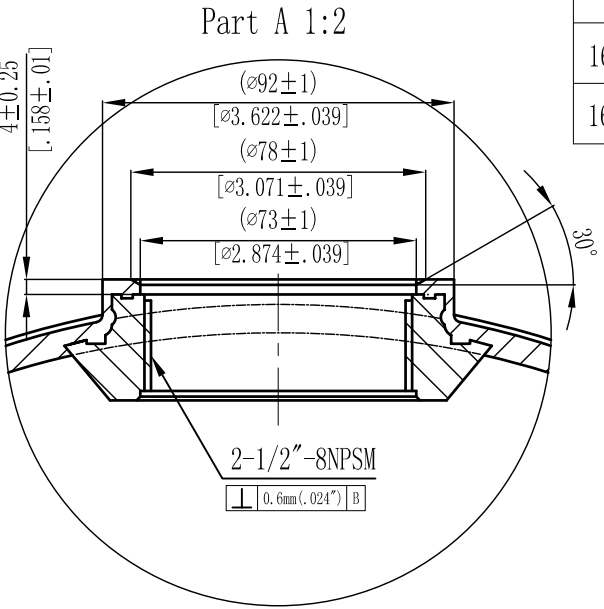

NOTES:

- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
- 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- 6 . SURFACE FINISH.
- 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
- 9 . USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

0	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION							2008/07/21
VERSION NO.	DESCRIPTION OF CHANGES:							SIGNATURE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):								
SIGNATURE				WAVE CYBER (SHANGHAI) CO., LTD.				
DESIGN	NAME	DATE						
INSPECTION				SCALE	MATERIAL	MODEL		
APPROVAL				1 : 5		DESCRIPTION		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.				QUANTITY	SMOOTHNESS	16" (2.5-4) FRP PRESSURE VESSEL (DOUBLE OPENING)		
				PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.	
						111160-00	0	
DO NOT MEASURE THE DIMENSIONS.						UNIT: MM		TOTAL PAGE: 1