



MODEL	VOLUME			DOME VOLUME			WEIGHT	
	liters	U. S. gal	cubic FT	liters	U. S. gal	cubic FT	Kg	LBS
30x72	708	187.05	25.02	72.07	19.03	2.55	90.5	199.1

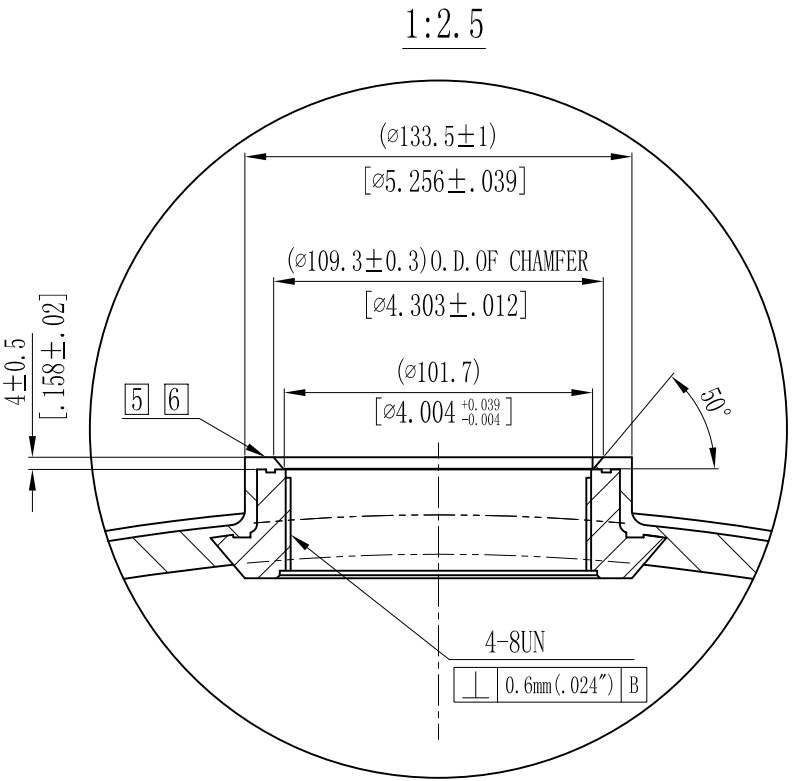

- NOTES:
- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - 5. SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - 6. SURFACE FINISH.
 - 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 - 9 . TANK TO BE BONDED TO BASE.
 - 10. USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

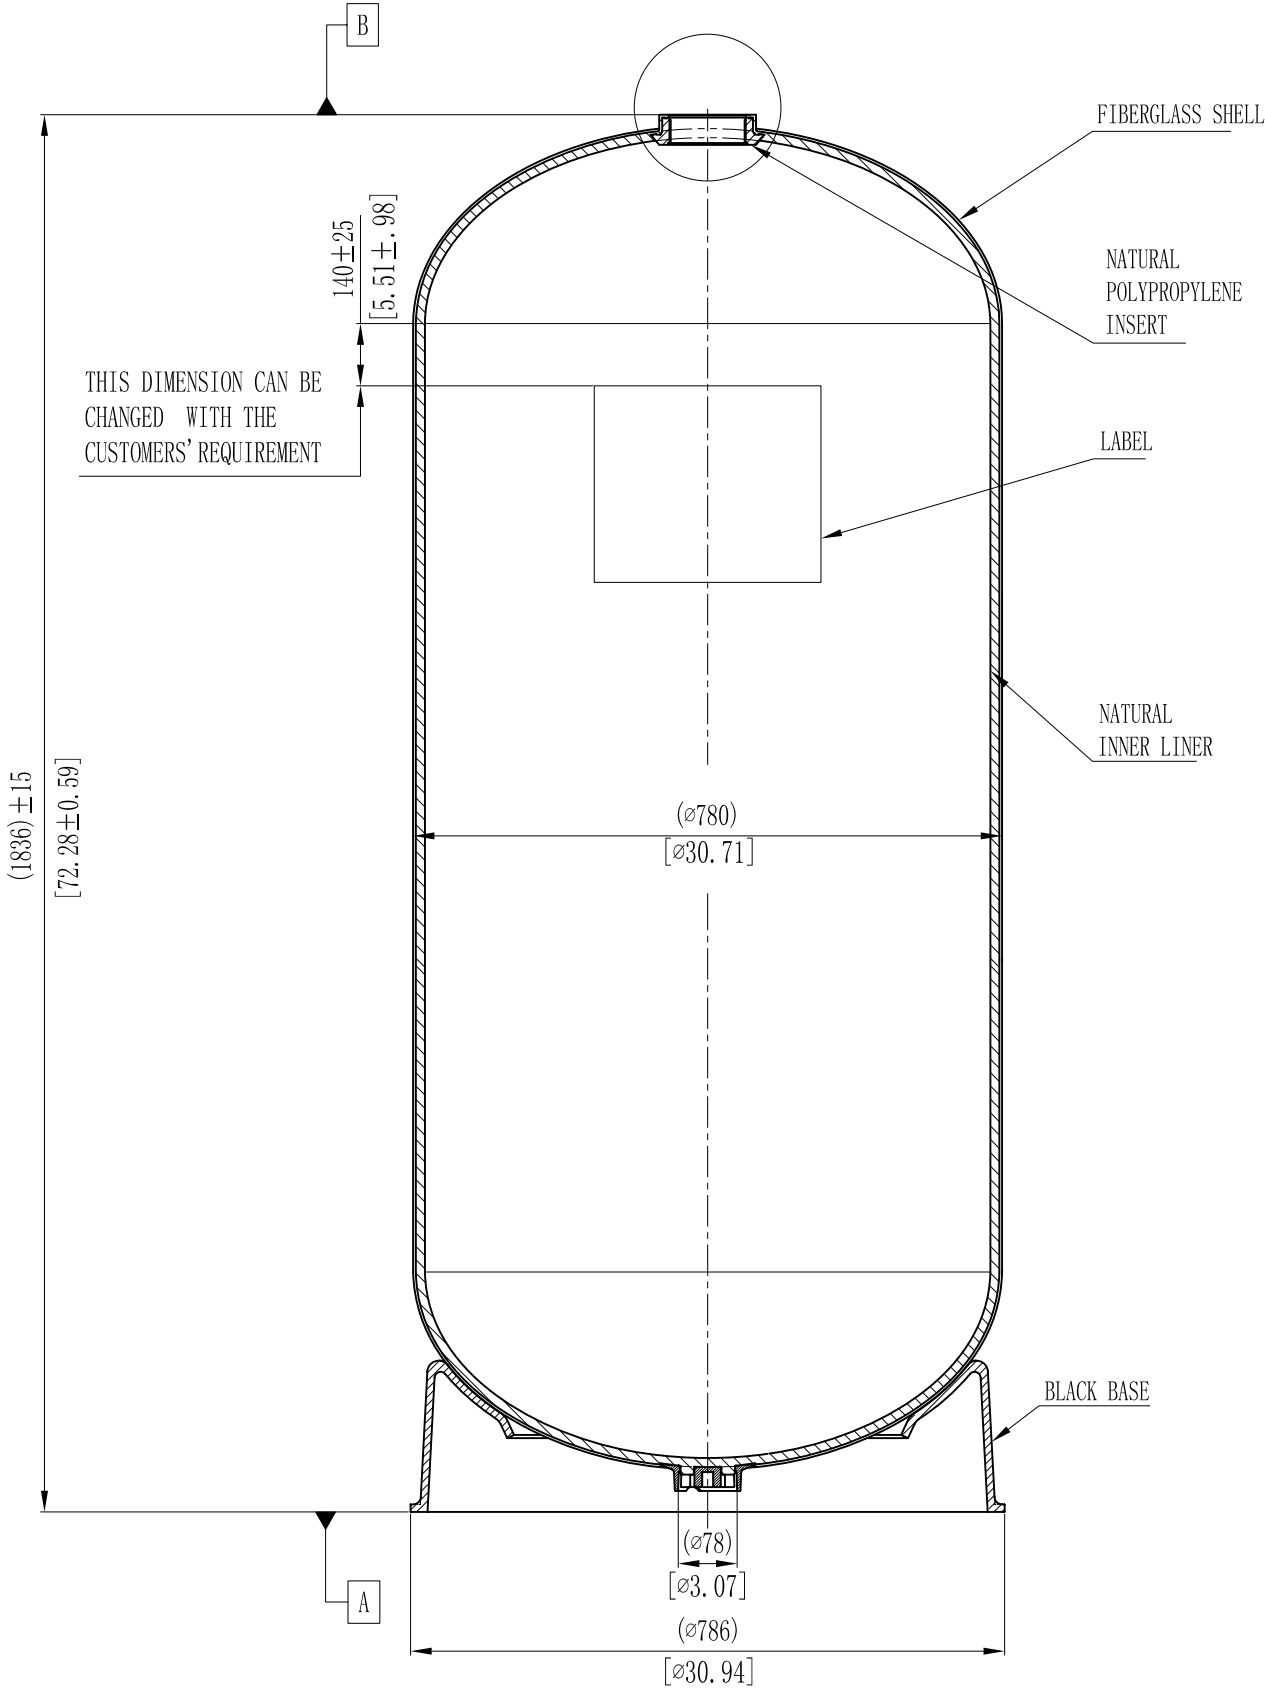

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

6	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2008/10/28	
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):		 WAVE CYBER (SHANGHAI) CO., LTD.				
SIGNATURE						
	NAME	DATE	SCALE	MATERIAL	MODEL	
DESIGN			1 : 10		DESCRIPTION	
INSPECTION			QUANTITY	SMOOTHNESS	30"FRP PRESSURE VESSEL (SINGLE OPENING)	
APPROVAL			PROJECTION	COMPUTER CODE		DRAWING NO.
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.					111301-00	VERSION NO.
		DO NOT MEASURE THE DIMENSIONS.		UNIT: MM	TOTAL PAGE: 1	
				6		