


23450-00

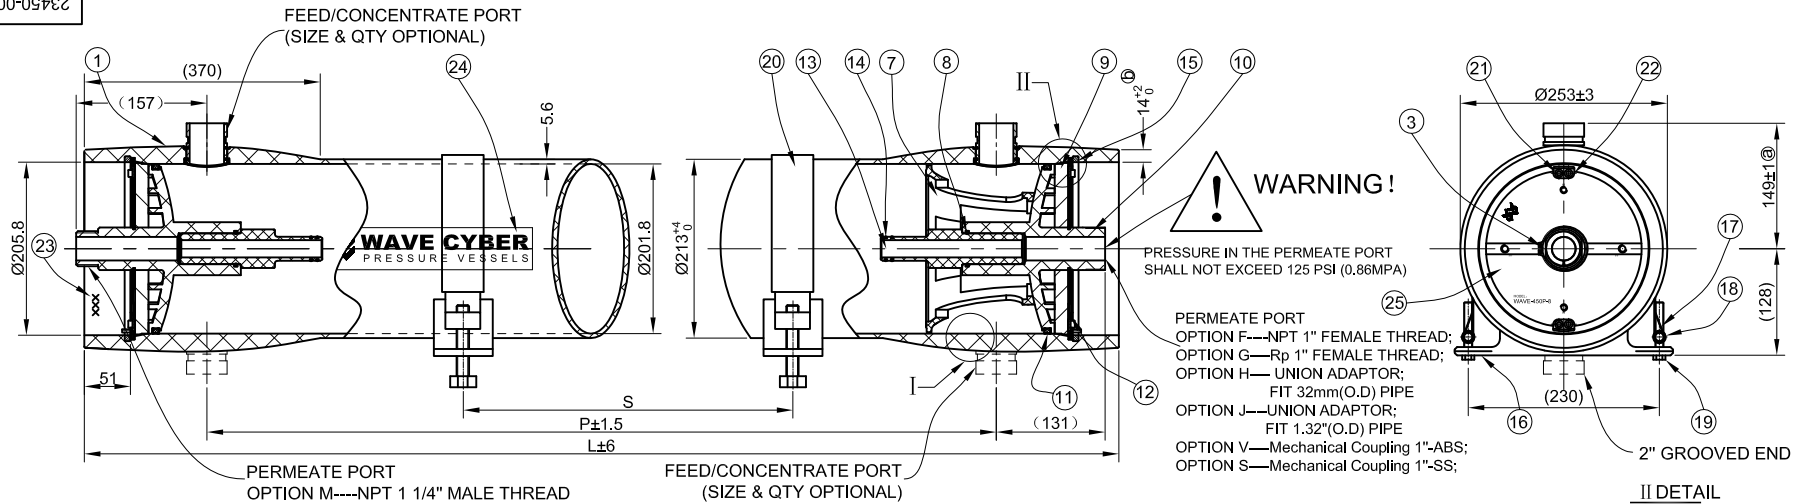

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

SIDEPORT	23450-02-02	T	2.5"	20088
	23450-02-01	S	2"	20087
	23450-02-03	R	1.5"	20089
SIDEPORT O RING	Ø70(I.D.)×Ø2		2.5"	10425
	Ø55(I.D.)×Ø2		2"	10424
	Ø42(I.D.)×Ø2		1.5"	10423
SHELL	(23450-01-02)EC45-08-01/2		2.5"	
	(23450-01-01)EC45-08-01/1		2"	
	(23450-01-03)EC45-08-01/3		1.5"	
CURVED SIDEPORT SEAL	23300-04-02-01		2.5"	10614
	23300-04-01-01		2"	10613
	23300-04-03-01		1.5"	10615
SIDE PORT RETAINING RING	(23300-06-02)EC30-08-06/2		2.5"	20112
	(23300-06-01)EC30-08-06/1		2"	20111
	(23300-06-03)EC30-08-06/3		1.5"	20113
DESCRIPTION	DRAWING NO.	CODE	SIZE	COMPUTER CODE

- 1.Flexible piping should be used on permeate connection to manifold.
- 2.Side port misalignment can not exceed 0.7mm in any direction.
- 3.MPV is not designed for negative pressures.

BEARING PLATE	23450-09-01	SB-209.6061-T651	20314	ASME CODE PRODUCT
450 PSI	23450-09	SB-211.6061-T6	20060	
DESCRIPTION	DRAWING NO.	MATERIAL	COMPUTER CODE	REMARK

PERMEATE PORT 450 PSI	23300-10-08	UF	CONNECTED WITH VICTAULIC	10502
	23300-10-09	N	NPT 1 1/2" MALE THREAD	10845
	23300-10-06	M	NPT 1 1/4" MALE THREAD	10086
	23300-10-05	S	MECHANICAL COUPLING 1"-SS	10071
	23300-10-05	V	MECHANICAL COUPLING 1"-ABS	10071
	23300-10-05	J	UNION ADAPTOR(American Standard)	10071
	23300-10-05	F	NPT 1" FEMALE THREAD	10071
DESCRIPTION	23300-10-05	G	Rp 1" FEMALE THREAD	10071
	23300-10-05	H	UNION ADAPTOR(National Standard)	10071
DESCRIPTION	DRAWING NO.	CODE	PERMEATE PORT SPECS	COMPUTER CODE

25	ALUMINUM PLATE LABEL		2	ADHESIVE LABEL	40843
24	LOGO LABEL		2	ADHESIVE LABEL	40255
23	SERIAL NO. LABEL		1	ARTPAPER 20"53	40425
22	RETAINING BLOCK	(23300-36-01	4	316	20183-1
21	SCREW	GB819-95	8	M5*14 STAINLESS STEEL	20833
20	STRAP PROTECTIVE JACKET	(23300-19)EC30-08-19	2or3	SOFT PVC	10188
19	STRAP SCREW		4or6	M8*90 STAINLESS STEEL, GRADE 8.8	20129
18	STRAP NUT	(23300-19)EC30-08-18	4or6	Hbb51-9	20123
17	STRAP	(23300-17)EC30-08-17	2or3	AR66 304	20123
16	SADDLE	(23300-16)EC30-08-16	2or3	TPU (S60D)	10141
15	EMBEDDED RING	(23450-15)EC45-08-15	2	SA-213, TP316L	20073
14	ADAPTOR O RING	(23300-14)EC30-08-14	4	EPDM	10182
13	ADAPTOR O RING	(23300-13)EC30-08-13	2	ABS CHIMEI 757K	10125
12	RETAINING RING	(23300-12)EC30-08-12	2	SA-479.316	20026
11	HEAD SEAL	23300-26	2	EPDM	10175
10	PERMEATE PORT(450PSI)	SEE "PERMEATE PORT CONFIGURATIONS"	2	PF062-3	SEE THE CHART
9	BEARING PLATE	SEE "BEARING PLATE CONFIGURATIONS"	2	SEE "BEARING PLATE CONFIGURATIONS"	SEE THE CHART
8	PERMEATE PORT O RING	(23300-08)EC30-08-08	2	EPDM	10181
7	THRUST CONE	(23300-07)EC30-08-07	1	PF062-3	10192
6	SIDE PORT RETAINING RING	SEE "SIDE PORT CONFIGURATIONS"	4	SA-479.316	SEE THE CHART
5	SIDE PORT O RING	SEE "SIDE PORT CONFIGURATIONS"	4	EPDM	SEE THE CHART
4	CURVED SIDE PORT SEAL	SEE "SIDE PORT CONFIGURATIONS"	2	EPDM	SEE THE CHART
3	PERMEATE RETAINING RING	(23300-03)EC30-08-03	2	AS90 316	20107
2	SIDE PORT	SEE "SIDE PORT CONFIGURATIONS"	2	SA-213, TP316L	SEE THE CHART
1	SHELL	SEE "SIDE PORT CONFIGURATIONS"	1	FIBER GLASS + EPOXY	SEE THE CHART
ITEM	DESCRIPTION	DRAWING NO.	QTY	MATERIAL	COMPUTER CODE

SHELL Length Code	L Inch (mm)	P Standard Inch (mm)	S Span Inch (mm)	Shell Weight lb (kg)
-1	58.7 (1491)	47 (1194)	1@28 (711)	57.2 (26)
-1.5	78.7 (1999)	67 (1702)	1@42 (1067)	67.1 (30.5)
-2	98.7 (2507)	87 (2210)	1@56 (1422)	74.8 (34)
-3	138.7 (3523)	127 (3226)	1@80 (2032)	92.4 (42)
-4	178.7 (4539)	167 (4242)	2@64 (1626)	110 (50)
-5	218.7 (5555)	207 (5258)	2@78 (1981)	127.6 (58)
-6	258.7 (6571)	247 (6274)	2@92 (2337)	145.2 (66)
-7	298.7 (7587)	287 (7290)	2@106 (2692)	162.8 (74)
-7.5	318.7 (8095)	307 (7798)	2@114 (2896)	172.7 (78.5)
-8	338.7 (8603)	327 (8306)	2@120 (3048)	180.4 (82)

TECHNICAL REQUIREMENT

1. MANUFACTURED IN CONFORMITY TO 《ASME BOILER&PRESSURE VESSEL CODE》 SECTION X: 《FIBER REINFORCED PLASTIC PRESSURE VESSELS》-CLASS I VESSELS;
 2. MAX OPERATING PRESSURE: 450Psi (3.1026MPa) , ALLOWABLE TEMPERATURE RANGE: 20°F(-7°C)~120°F(49°C), NOT APPLICABLE TO CORROSIVE LIQUID;
 3. LEAKAGE TEST: HYDRO TEST, TESTED AT 1.1 TIMES ITS OPERATING PRESSURE, I.E.: 495Psi (3.4129MPa) , SAMPLE RATE: 100%;
- NOTE: DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.

16	ADD THE NOTES:		2013/02/06
15	RETAINING BLOCK AND SCREW CHANGED: HEAD SEAL CHANGED:		2012/09/04
14	INCREASE TOLERANCE:		2011/07/04
13	HEAD SEAL CHANGED:		2011/02/11
REVISION	DESCRIPTION	SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):		THE DIMENSIONS ARE FOR REFERENCE ONLY	
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.	
DESIGN	NAME	SCALE	DATE
INSPECTION		1:6	
APPROVAL		QUANTITY	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		SMOOTHNESS	
PROJECTION		COMPUTER CODE	
DO NOT MEASURE THE DIMENSIONS.		DRAWING NO. (23450-00)EC45-08-00	VERSION NO. 16
UNIT: MM		TOTAL PAGE: 1	