


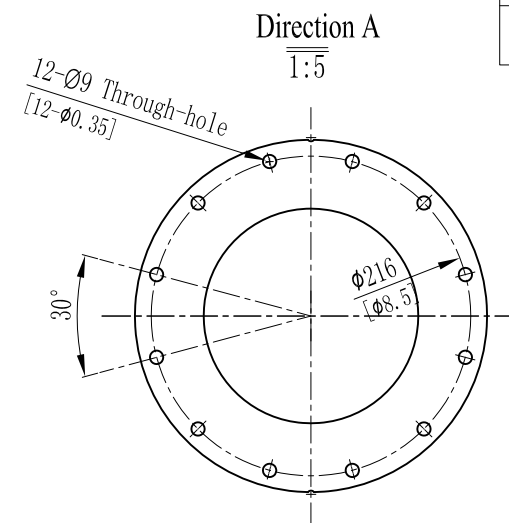

ALUMINUM FLANGE BOLT HOLE PATTERN

1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
2 . OPERATING SPECIFICATIONS:

- A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-150° F (1-65°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
3. VISUAL LINER INSPECTION
 - A. NO MORE THAN 20 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 5×5mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 4. ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 5. SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 6. SURFACE FINISH.
 7. DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 8. TANK TO BE BONDED TO BASE.
 9. USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS WHEN PLACED ON THE TOP OF THE FLANGE.
 10. AFTER THE TANK IS LEVELED, IT IS RECOMMENDED THAT THE TANK BE BOLTED TO THE FLOOR IN SIX POSITIONS PER THE TRIPOD BASE BOLT HOLE PATTERN WITH 3/8" ANCHORS.

0		FIRST VERSION							
VERSION NO.		DESCRIPTION OF CHANGES:				SIGNATURE		DATE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):				 WAVE CYBER (SHANGHAI) CO., LTD.					
SIGNATURE									
		NAME		DATE		SCALE 1 : 10 QUANTITY PROJECTION DO NOT MEASURE THE DIMENSIONS. MATERIAL SMOOTHNESS COMPUTER CODE MODEL DESCRIPTION 48" FRP PRESSURE VESSEL (SINGLE FLANGE OPENING) DRAWING NO. 113481-00 VERSION NO. 0 TOTAL PAGE: 1			
DESIGN									
INSPECTION									
APPROVAL									
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.									