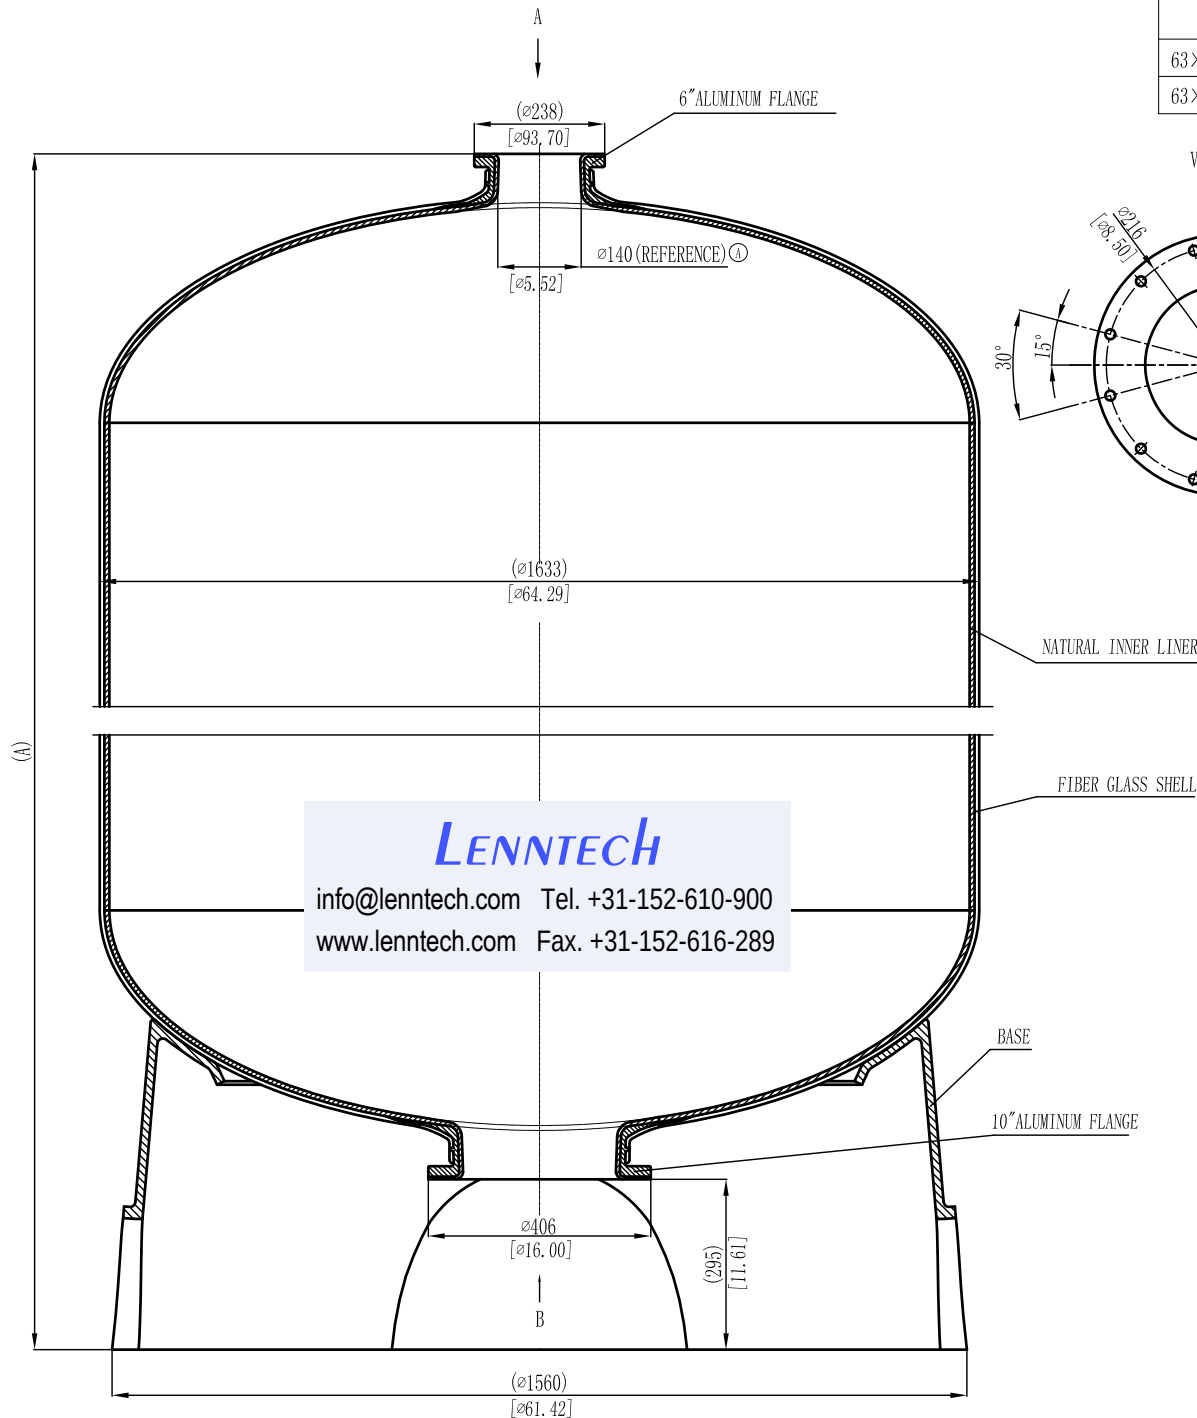
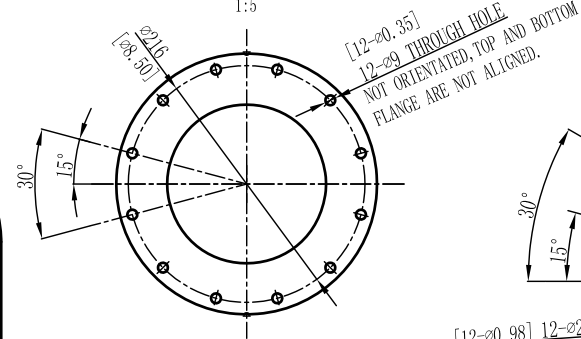
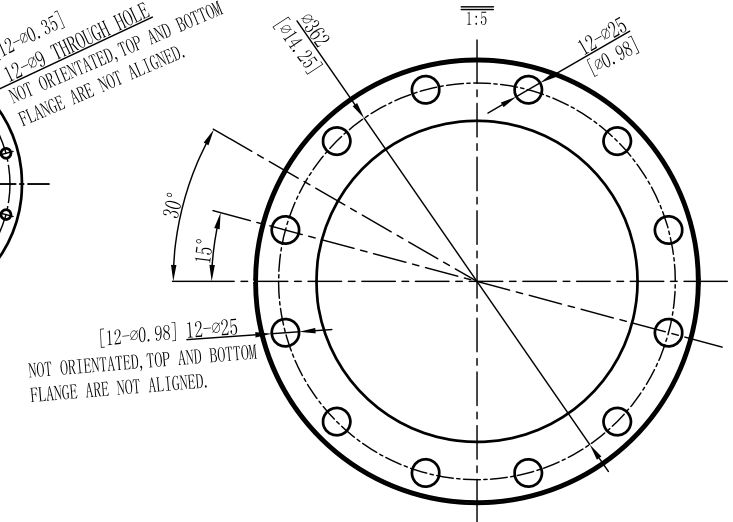


MODEL	A				VOLUME			DOME VOLUME			WEIGHT(kg)	
	6"(Top)-10"(Bottom)											
	mm	inch	+/-		liters	U. S. gal	cubic FT	liters	U. S. gal	cubic FT	kg	LBS
mm			inch									
63×67	2044	80.47	15	0.59	2451	647.56	86.61	511	135.01	18.06	272	598.4
63×86	2475	97.44	15	0.59	3306	873.45	116.82	511	135.01	18.06	320	704

VIEW A
1:5VIEW B
1:5

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.3 BAR)
 - TEMPERATURE RANGE - 34-150° F (1-65°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
- VISUAL LINER INSPECTION
 - NO MORE THAN 20 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 5×5mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- SURFACE FINISH.
- DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
- TANK TO BE BONDED TO BASE.
- USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS WHEN PLACED ON THE TOP OF THE FLANGE.

4	ADDED DIMENSION A			2011/08/29
3	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION			2009/03/16
VERSION NO.	DESCRIPTION OF CHANGES:	SIGNATURE	DATE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):				
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.		
	NAME	DATE		
DESIGN			SCALE	MATERIAL
INSPECTION			1 : 10	MODEL
APPROVAL			QUANTITY	DESCRIPTION
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	SMOOTHNESS
			COMPUTER CODE	63" FRP PRESSURE VESSEL (6"-10" FLANGE)
			DRAWING NO.	VERSION NO.
			113636-00	4
DO NOT MEASURE THE DIMENSIONS.			UNIT: MM	TOTAL PAGE: 1