


00-II609II



MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		Liters	U.S. GAL	CUBIC FT	Liters	U.S. GAL	CUBIC FT	Kg	LBS
			mm	inch								
9×17	431	16.97	4	.16	13.7L	3.62	0.48	1.30	0.34	0.05	3.21	7.06
9×35	896	35.28	4	.16	31.6L	8.35	1.12	1.30	0.34	0.05	5.65	12.43
9×42	1074	42.28	5	.20	38.2L	10.09	1.35	1.30	0.34	0.05	6.76	14.87
9×48	1228	48.35	5	.20	44.6L	11.78	1.58	1.30	0.34	0.05	7.86	17.29
9×18	459	18.07	5	.20	14.7L	3.88	0.52	1.30	0.34	0.05	3.41	7.50
9×40	1018	40.08	5	.20	36.3L	9.59	1.28	1.30	0.34	0.05	6.42	14.12
9×24	610	24.02	5	.20	20.4L	1.49	0.72	1.30	0.34	0.05	4.21	9.26

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - SURFACE FINISH.
 - DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

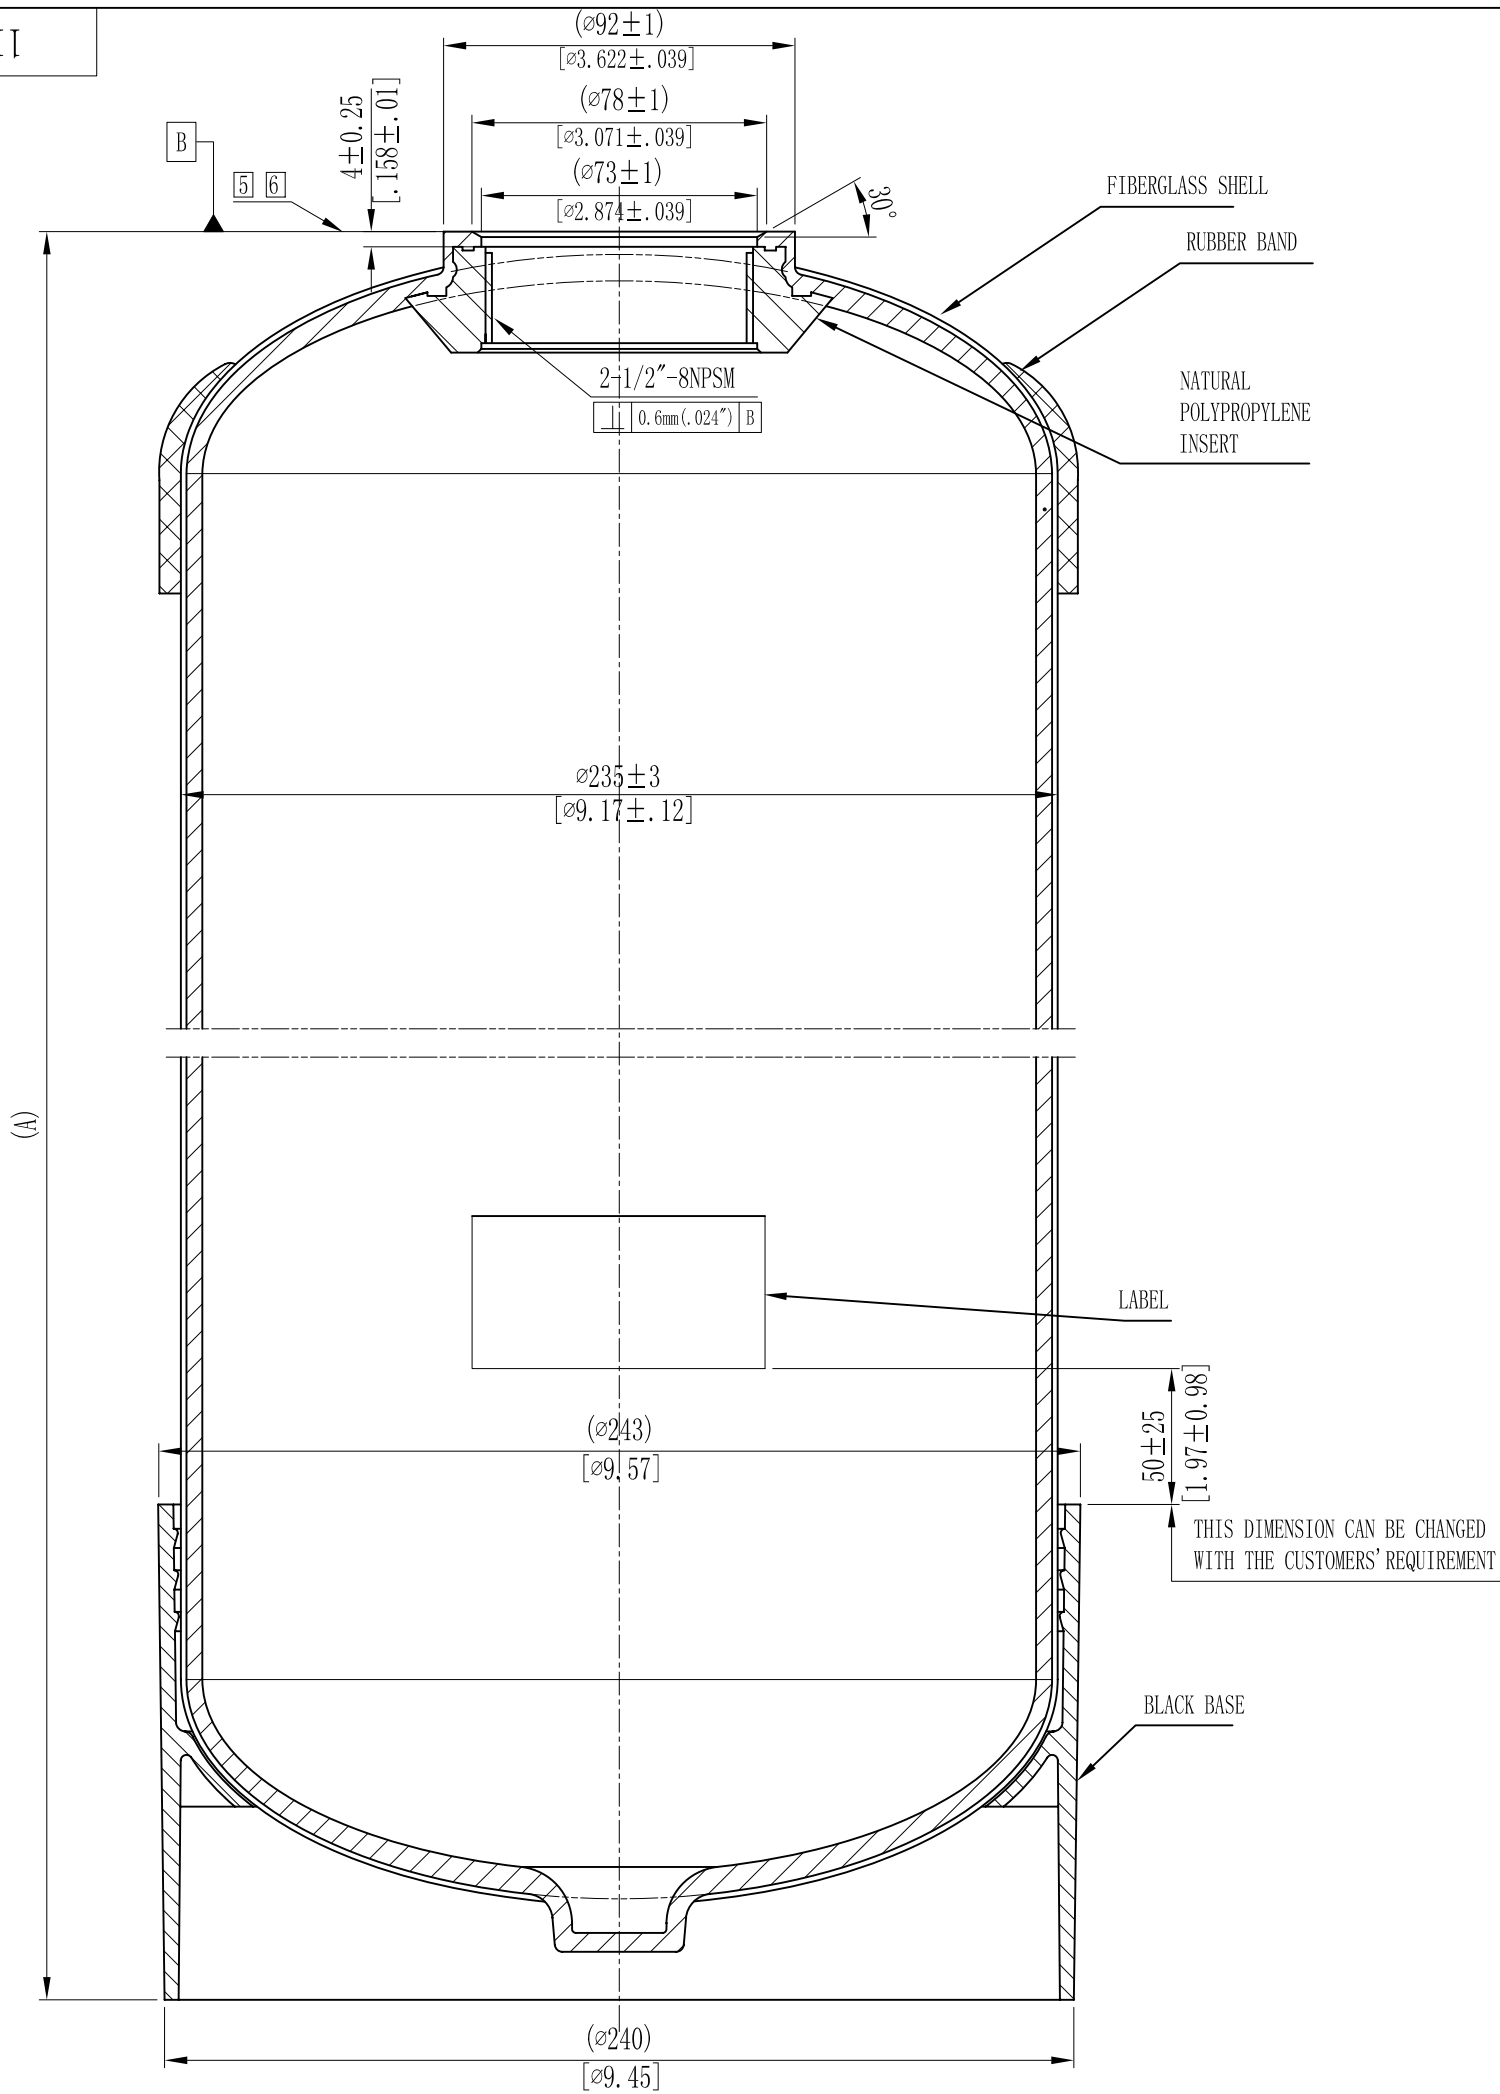

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

0	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION					2008/07/21	
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE		DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			 WAVE CYBER (SHANGHAI) CO., LTD.				
SIGNATURE							
	NAME	DATE					
DESIGN			SCALE	MATERIAL	MODEL		
INSPECTION			1 : 2		DESCRIPTION		
APPROVAL			QUANTITY	SMOOTHNESS	9" (DI TANK) FRP VESSEL (STANDARD BASE)		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.		VERSION NO.
					1160911-00	0	
DO NOT MEASURE THE DIMENSIONS.				UNIT: MM		TOTAL PAGE: 1	