
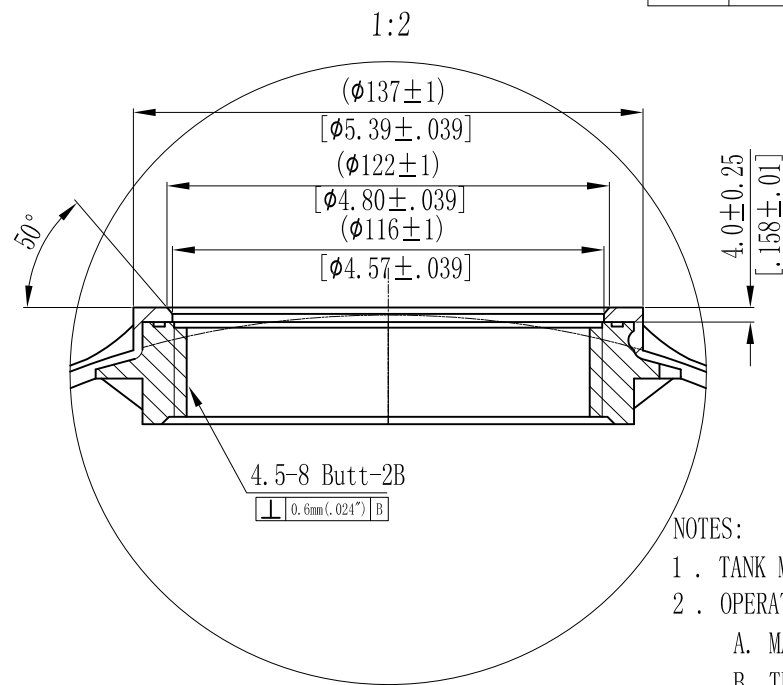


00-1971911

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U. S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
			mm	inch								
12x48	1240	48.82	6	.24	89.0	23.51	3.14	3.87	1.02	0.14	11.28	24.82
12x52	1334	52.52	6	.24	97.0	25.63	3.43	3.87	1.02	0.14	11.98	26.36
12x36	948	37.32	6	.24	57.5	15.19	2.03	3.87	1.02	0.14	8.69	19.12
12x42	1074	42.28	6	.24	69.6	18.38	2.45	3.87	1.02	0.14	9.71	21.36

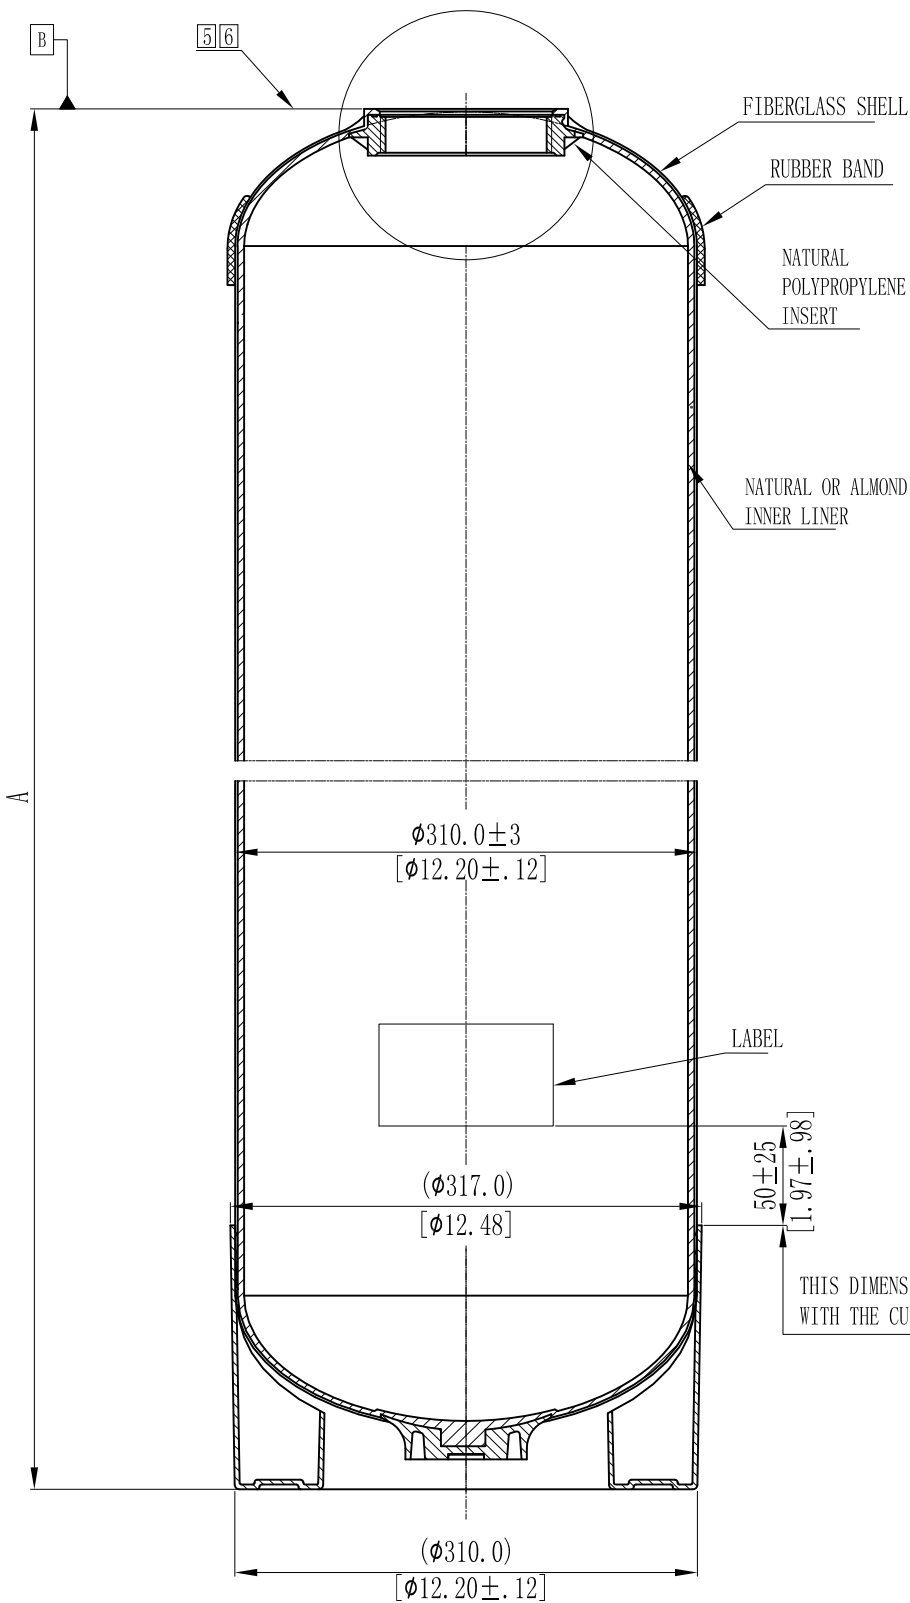

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5 BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - SURFACE FINISH.
 - DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

LENNTECH
info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

3	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION			2014/01/15
VERSION NO.	DESCRIPTION OF CHANGES:			DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):		SIGNATURE		
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.		
DESIGN	NAME	DATE	SCALE	MATERIAL
INSPECTION			1 : 5	
APPROVAL			QUANTITY	SMOOTHNESS
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		PROJECTION	COMPUTER CODE	MODEL
				DESCRIPTION
				12" (4.5" DI TANK) FRP VESSEL (STANDARD BASE)
				DRAWING NO.
				1161251-00
				VERSION NO.
				3
DO NOT MEASURE THE DIMENSIONS.			UNIT: MM	TOTAL PAGE: 1