



EBARA

LENNTECH
WATER TREATMENT SOLUTIONS

30Y
3" OIL FILLED SUBMERSIBLE MOTORS



LENNTECH
WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

30Y

3" SUBMERSIBLE MOTORS

oil filled



TECHNICAL DATA

- Cooling with atossic dielectric liquid
- Axial thrust 1200 N
- Single phase version from 0,37 kW up to 0,75 kW
three phase version from from 0,37 kW up to 1,1 kW
- Insulation class F – protection degree IP58
- Easy coupled shaft overhang
- Shaft output in AISI 303
- High resistance nickel cast iron bracket
- Rewindable

TECHNICAL DATA - 30Y single phase 50Hz

50Hz	Model	Thrust N	Weight kg	H mm	kW	P ₂ HP	I _n Amp	I _{start}	rpm	Cosφ	T _s /T _n	Eff%	μF
230V single phase	3OYM 0,50 HP	1200	6	377	0,37	0,5	3,75	8,8	2800	0,96	0,58	51	16
	3OYM 0,75 HP	1200	6,4	397	0,55	0,75	4,50	12,2	2800	0,98	0,54	55	20
	3OYM 1,00 HP	1200	6,8	416	0,75	1	5,85	14,5	2800	0,98	0,55	57	25

TECHNICAL DATA - 30Y three phase 50Hz


50Hz	Model	Thrust N	Weight kg	H mm	kW	P ₂ HP	I _n Amp	I _{start}	rpm	Cosφ	T _s /T _n	Eff%	μF
400V three phase	3OYT 0,5 HP	1200	6	377	0,37	0,5	2,00	8,0	2800	0,71	2,1	51	/
	3OYT 0,75 HP	1200	6,1	377	0,55	0,75	2,10	9,1	2800	0,75	2	56	/
	3OYT 1,00 HP	1200	6,4	397	0,75	1	2,50	11,7	2800	0,75	2	63	/
	3OYT 1,50 HP	1200	6,8	416	1,1	1,5	3,20	14,0	2800	0,75	2	63	/

30Y

3" SUBMERSIBLE MOTORS

oil filled

DIMENSIONS - 30Y 50Hz

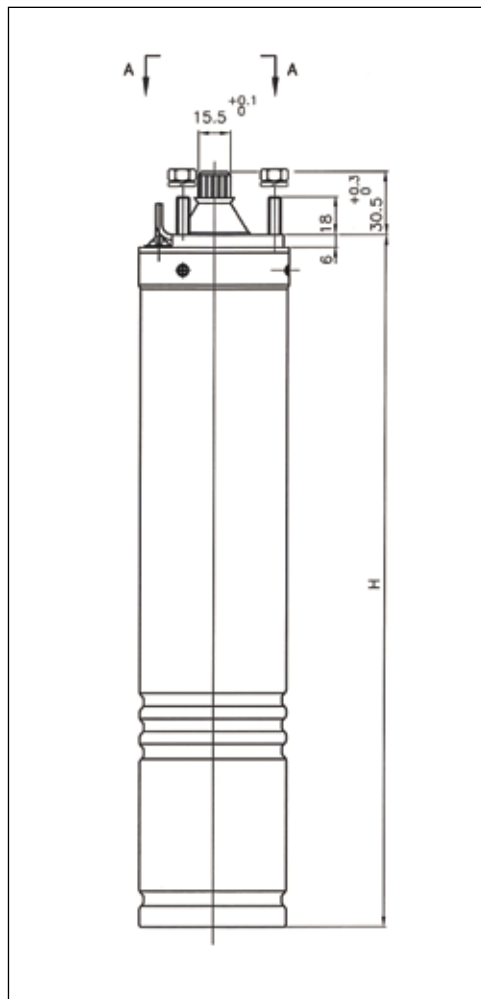

DIMENSIONS TABLE - 30Y 50Hz

Type	kW	HP	Thrust	H mm	Weight kg
30YM 0,50 HP	0,37	0,5	1200	377	6
30YM 0,75 HP	0,55	0,75	1200	397	6,4
30YM 1,00 HP	0,75	1	1200	416	6,8
30YT 0,5 HP	0,37	0,5	1200	377	6
30YT 0,75 HP	0,55	0,75	1200	377	6,1
30YT 1,00 HP	0,75	1	1200	397	6,4
30YT 1,50 HP	1,1	1,5	1200	416	6,8

CABLE SELECTION - e.g.: 0,75 kW motor - 230V single phase - cable lenght 75 m = 4x2,5 mm²

Motor	HP	kW	Cable type				
			4x1	4x1,5	4x2,5	4x4	4x6
3" Single phase 230V	0,5	0,37	50	75	125	-	-
	0,75	0,55	38	57	95	152	-
	1	0,75	30	45	75	120	174
3" Three phase 400V	0,5	0,37	240	-	-	-	-
	0,75	0,55	164	246	-	-	-
	1	0,75	133	200	233	-	-
	1,5	1,1	97	146	244	390	-

LENNTECH
WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289