


## GIW® ZW Double-Suction Vertical Pump for Highly Abrasive Slurries

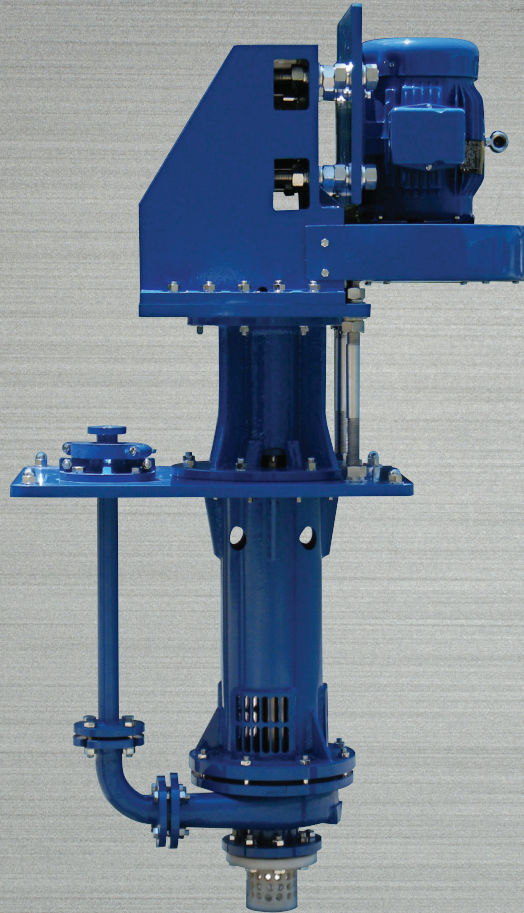

# Choose the GIW® ZW Pump to boost productivity

## ZW Delivers Non-stop Solutions

GIW® vertical pump solutions provide performance and efficiency at great value. The ZW series, with minimal service requirements, yields an economical answer for abrasive slurries.

### Technical Data


|                   |                                    |
|-------------------|------------------------------------|
| Discharge         | 40 to 150 mm                       |
| Flow rates        | up to 1760 gpm<br>(up to 400 m³/h) |
| Total head        | up to 115 ft (up to 35 m)          |
| Pressure rating   | up to 145 psi (up to 10 bar)       |
| Temperature limit | up to 150°F (+65°C)                |

### Applications

- Abrasive Slurries
- Dewatering
- Floor Clean Up
- Process Transfer

### Design and Technology

- Maximum wear resistance through high chrome material configuration
- Exclusive top and bottom suction arrangement allows for high concentration pumpability and maximum clearing of pump
- Large solids pass freely due to semi-open impeller design
- Keyed impeller system ensures a firm connection and fail-safe operation
- Vertical cantilever design means no submerged lower bearing, eliminating unnecessary downtime
- Heavy duty bearing arrangement delivers rugged service life with a wide variety of motor size options

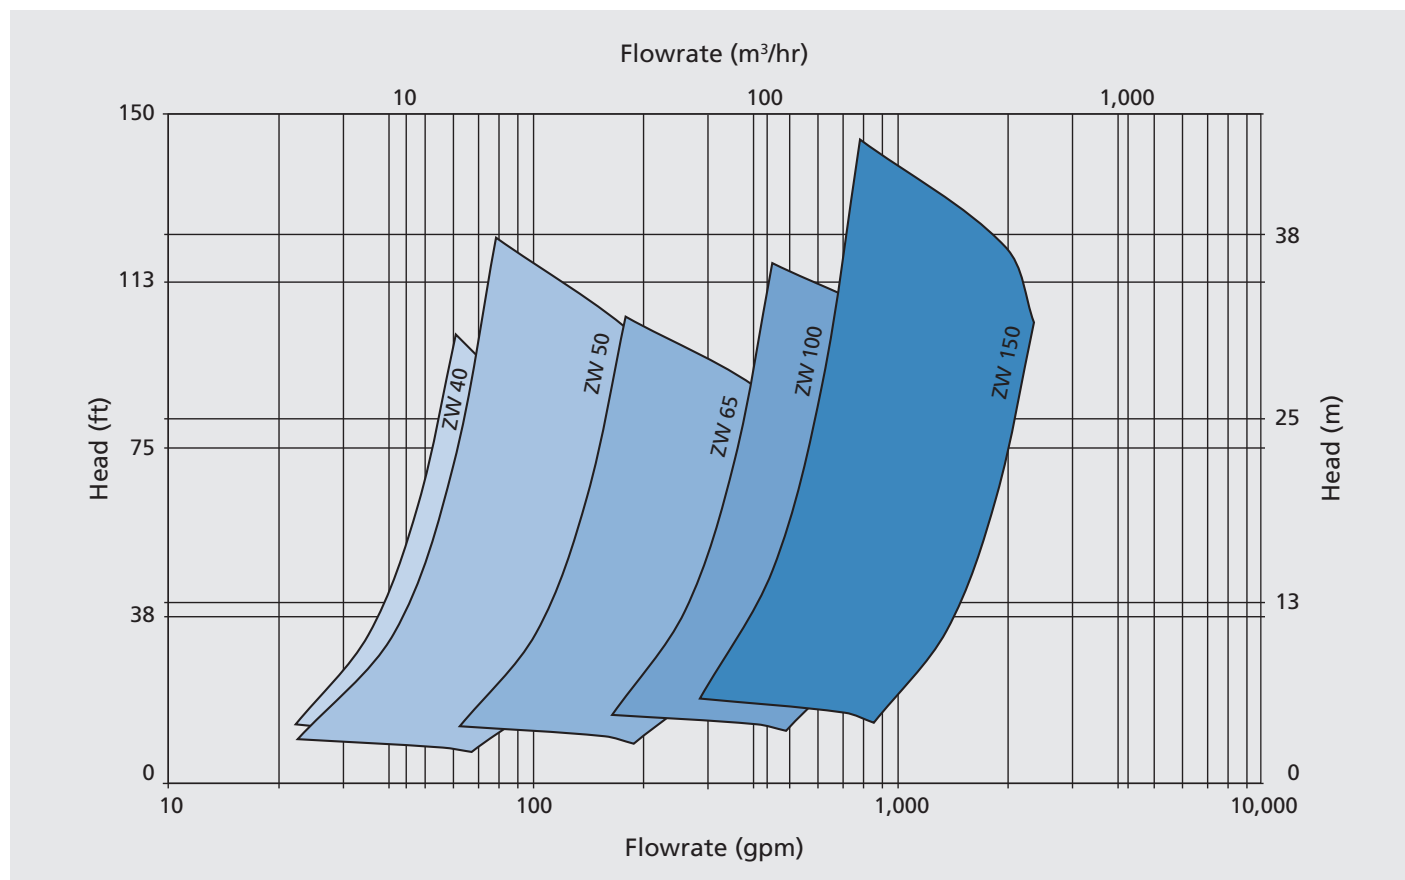

0000.000-US / 03.21 / © GIW Industries, Inc. 2021 · Subject to technical modifications.



**LENNTECH**  
WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900  
www.lennotech.com Fax. +31-152-616-289

® Slurry Pumps