




MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
			mm	inch								
7x17(b)	423	16.65	+4 -2	+ .16 - .08	8.3	2.19	0.29	0.59	0.16	0.02	1.67	3.67
7x30(b)	753	29.65	+4 -2	+ .16 - .08	16.2	4.28	0.57	0.59	0.16	0.02	2.66	5.85

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3 × 3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - SURFACE FINISH.
 - DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

REMARK:
BELGIAN CUSTOMERS PLEASE SEE THE DATA MARKED (b);

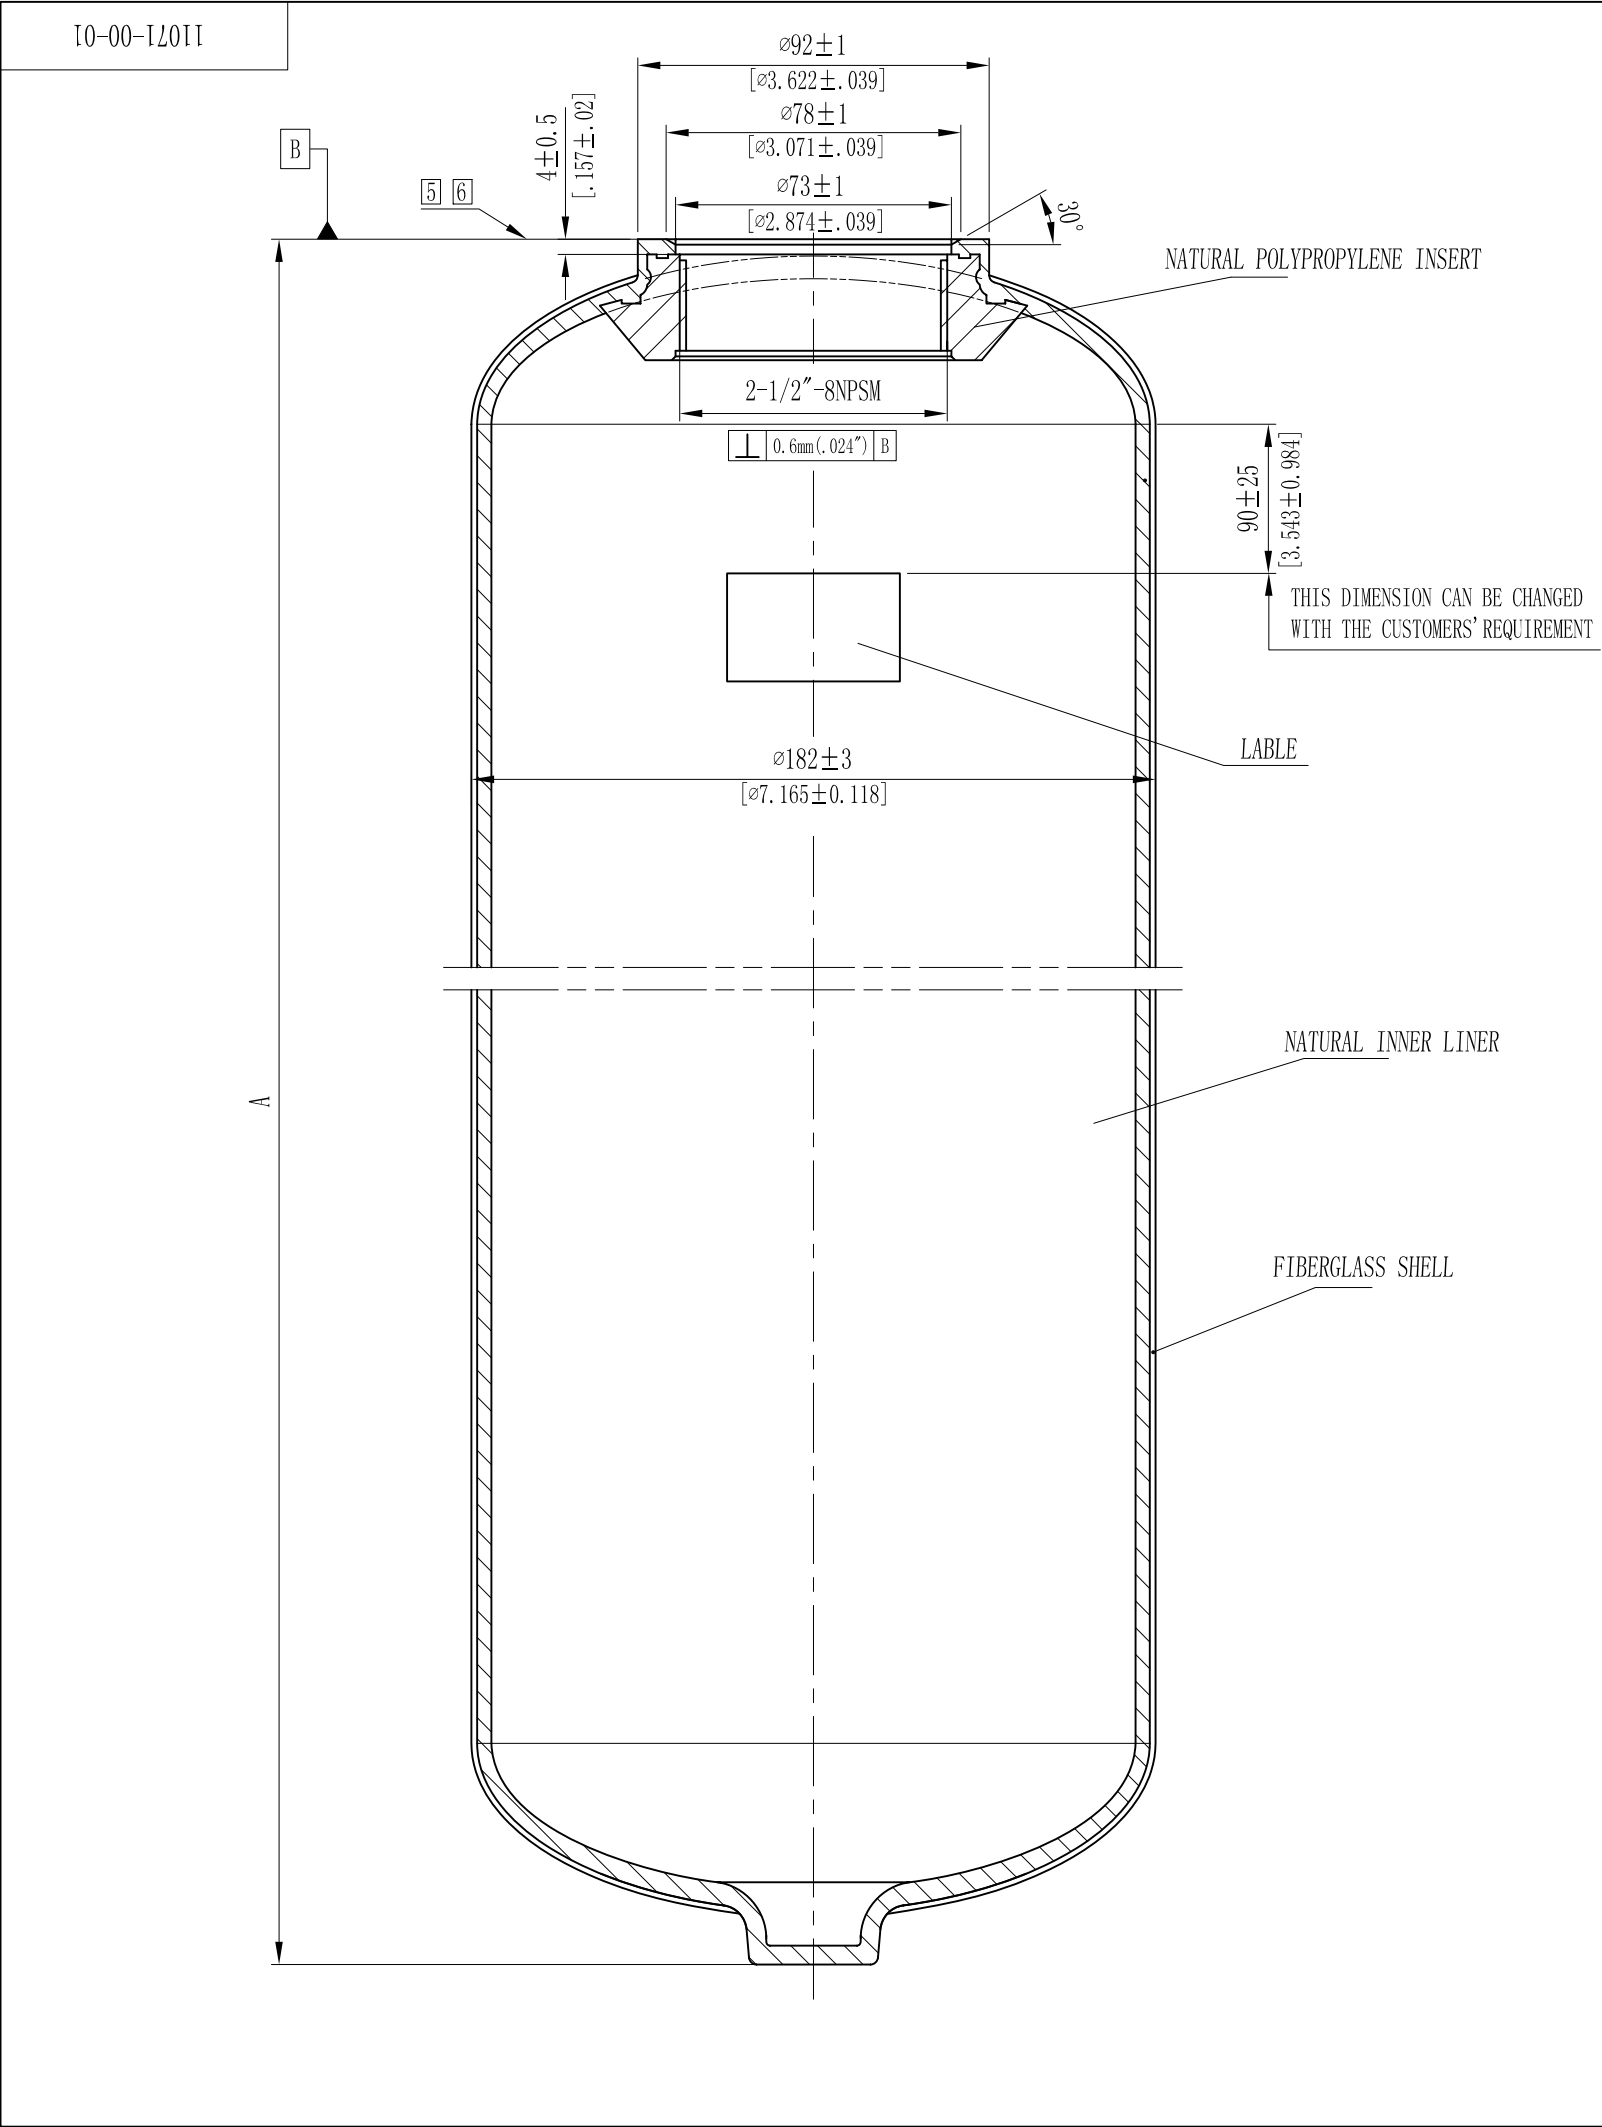

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

1	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2009/08/10	
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):						
SIGNATURE			 WAVE CYBER (SHANGHAI) CO., LTD.			
DESIGN	NAME	DATE				
INSPECTION			SCALE	MATERIAL	MODEL	
APPROVAL			1 : 2		DESCRIPTION	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			QUANTITY	SMOOTHNESS	7"FRP PRESSURE VESSEL (W/O BASE W/O POLE PIECE)	
			PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.
					111071-00-01	1
DO NOT MEASURE THE DIMENSIONS.					UNIT: MM	TOTAL PAGE: 1