
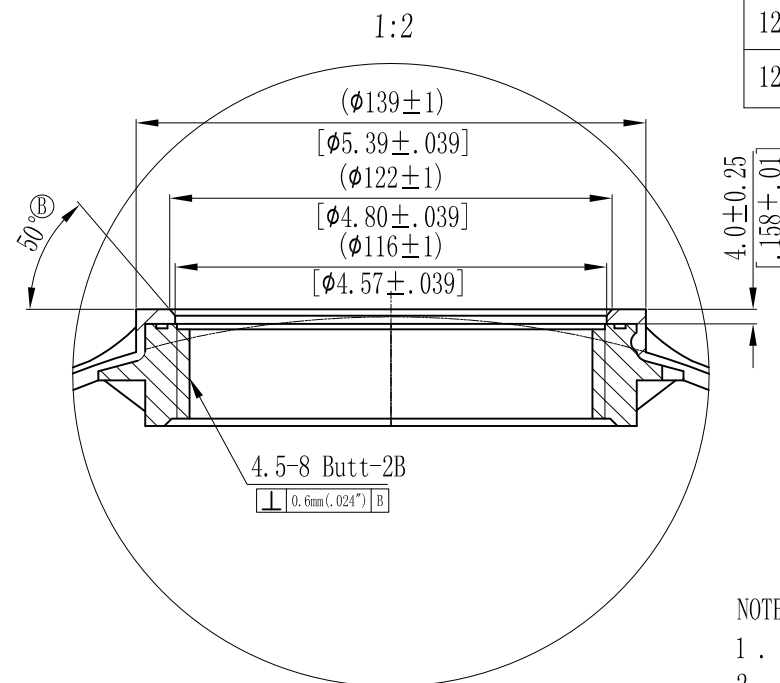


116125-00

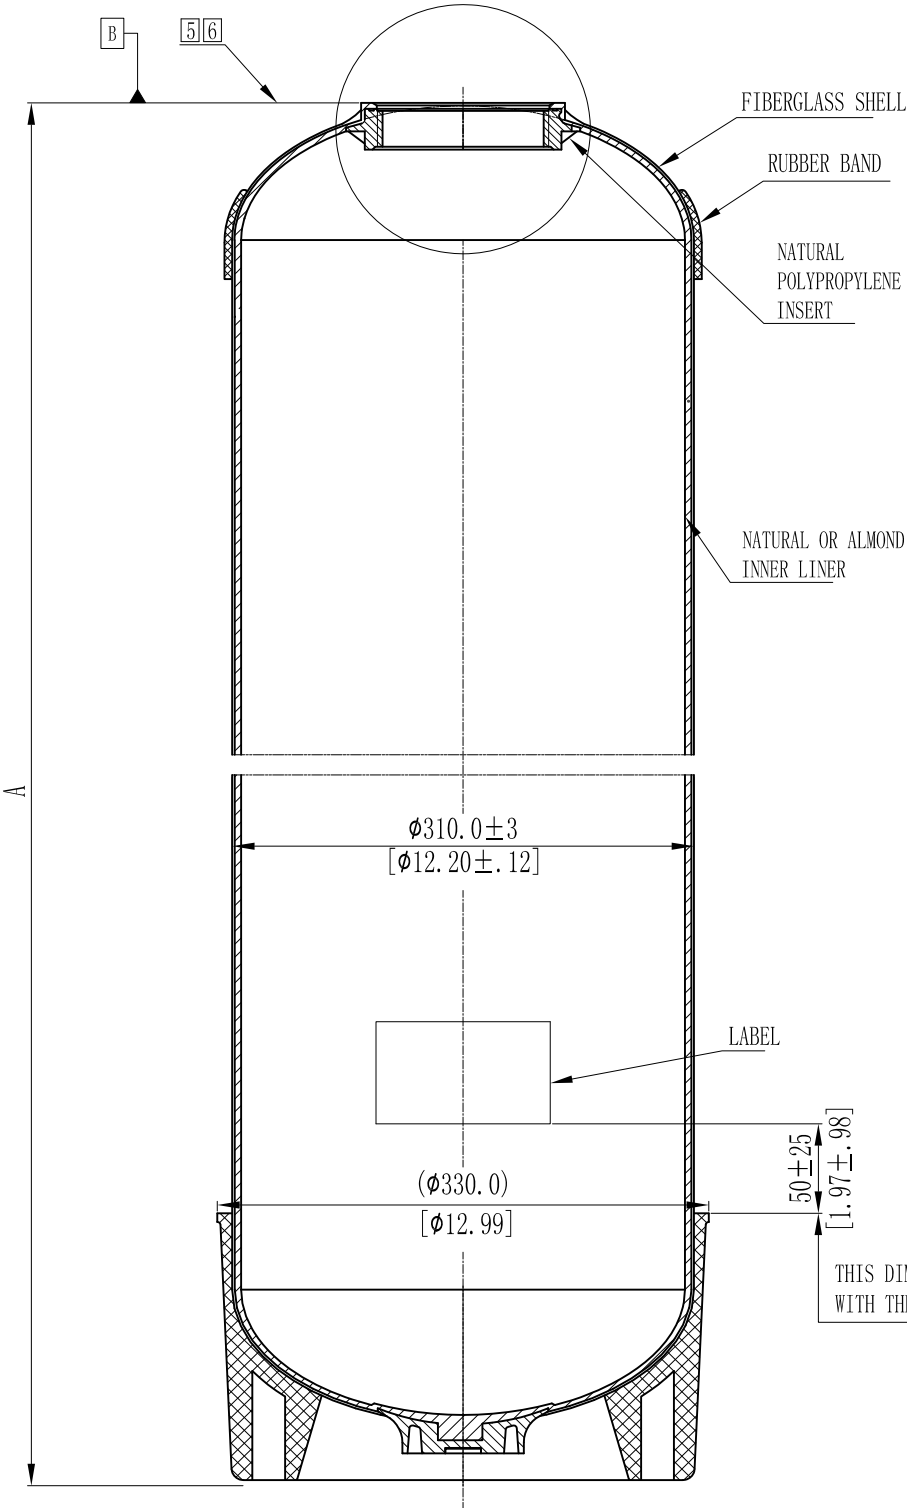

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S.gal	cubic FT	liters	U.S.gal	cubic FT	Kg	LBS
			mm	inch								
12x48	1240	48.82	6	.24	89.0	23.51	3.14	3.87	1.02	0.14	16.18	35.60
12x52	1360	53.54	6	.24	97.0	25.63	3.43	3.87	1.02	0.14	16.88	37.14
12x36	948	37.32	6	.24	57.5	15.19	2.03	3.87	1.02	0.14	13.59	29.90
12x42	1096	43.15	6	.24	69.6	18.38	2.45	3.87	1.02	0.14	14.61	32.2

NOTES:

- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5 BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5" Hg (127 mm Hg)
- 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3 mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- 6 . SURFACE FINISH.
- 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

5	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION					2014/01/14
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):		 WAVE CYBER (SHANGHAI) CO., LTD.				
SIGNATURE						
	NAME	DATE	SCALE	MATERIAL	MODEL	
DESIGN			1 : 5	SMOOTHNESS	DESCRIPTION	
INSPECTION					12" (4.5" DI TANK) FRP VESSEL	
APPROVAL			QUANTITY			
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.
					116125-00	5
DO NOT MEASURE THE DIMENSIONS.				UNIT: MM	TOTAL PAGE: 1	