


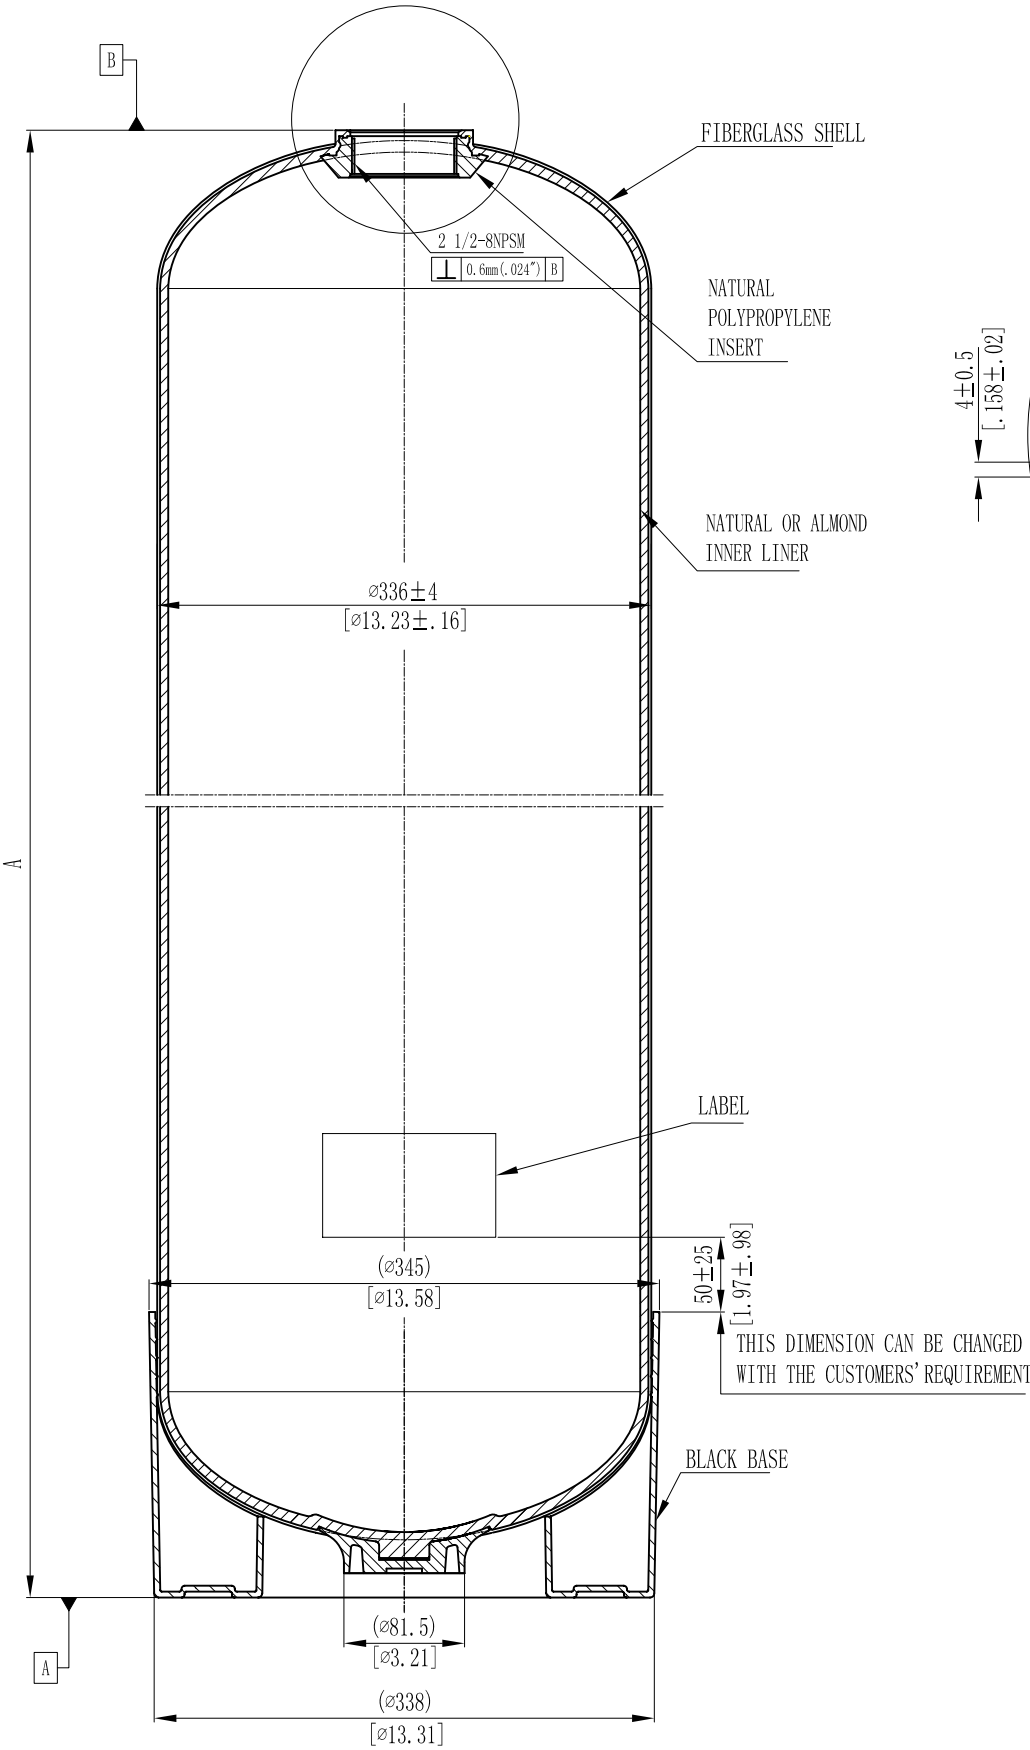

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S.gal	cubic FT	liters	U.S.gal	cubic FT	Kg	LBS
			mm	inch								
13x35	916	36.06	6	.24	62.8	16.59	2.22	4.91	1.30	0.17	7.28	16.02
13x44	1145	45.08	6	.24	84.8	22.40	3.00	4.91	1.30	0.17	9.10	20.02
13x54	1398	55.04	6	.24	105.7	27.93	3.73	4.91	1.30	0.17	10.80	23.76

- NOTES:
- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - 6 . SURFACE FINISH.
 - 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 - 9 . USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

3	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2010/12/14
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):					
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.			
DESIGN	NAME	DATE	SCALE	MATERIAL	MODEL
INSPECTION			1 : 5		DESCRIPTION
APPROVAL			QUANTITY	SMOOTHNESS	13" FRP PRESSURE VESSEL
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.
					111131-00
					VERSION NO.
					3
DO NOT MEASURE THE DIMENSIONS.				UNIT: MM	TOTAL PAGE: 1