
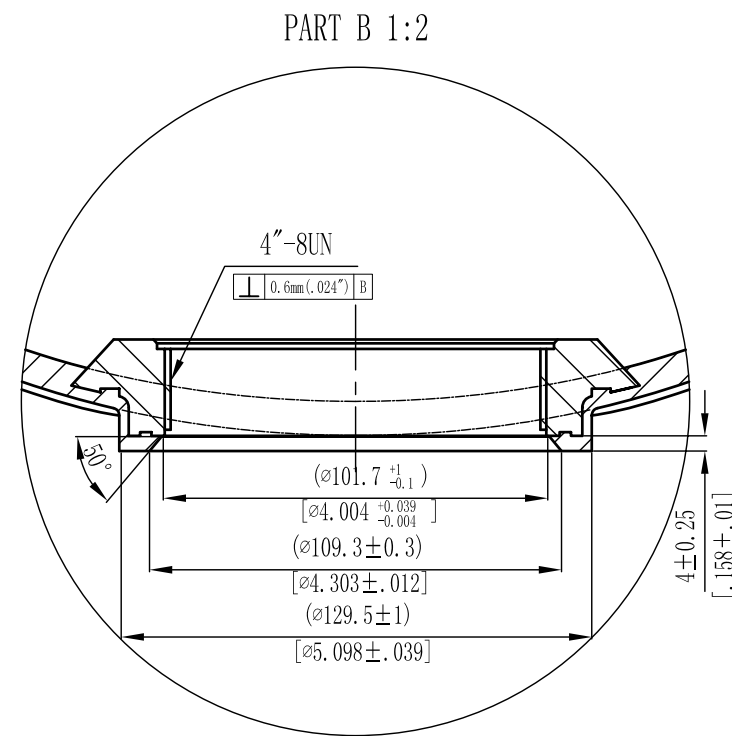
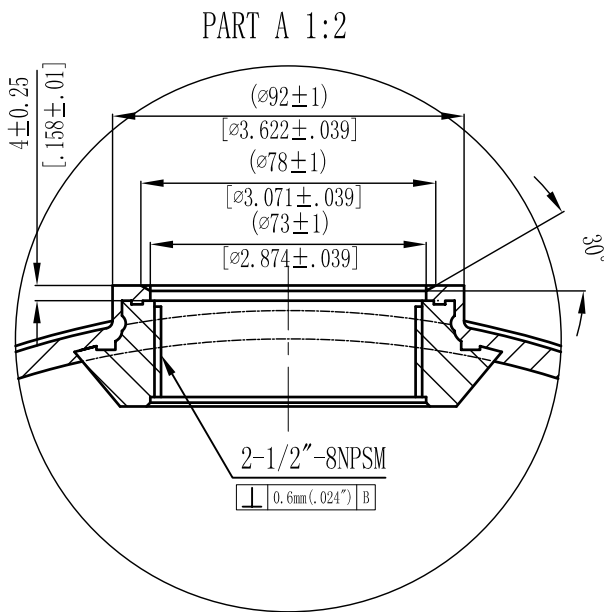


MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
			mm	inch								
13x44	1279	50.35	6	.24	84.8L	22.40	3.00	4.91	1.30.	0.17	8.5	18.70
13x54	1542	60.71	6	.24	105.7L	27.93	3.73	4.91	1.30.	0.17	10.9	23.98

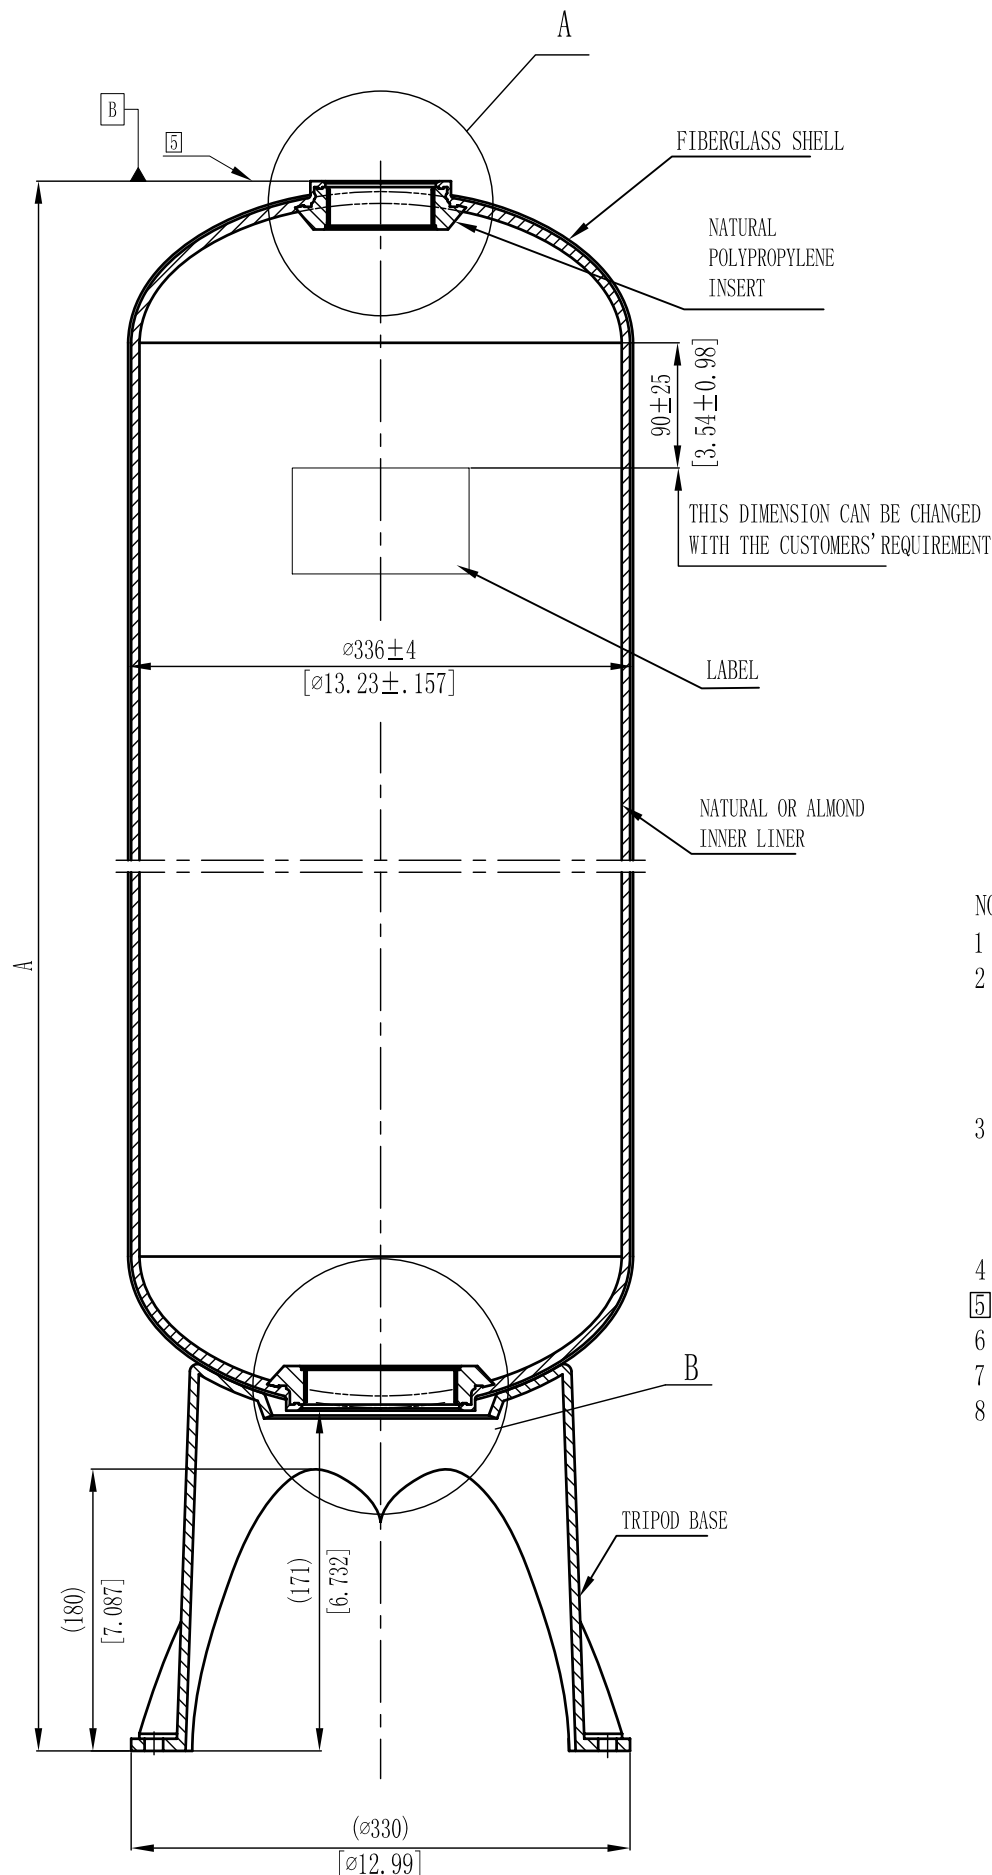

- NOTES:
1. TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 2. OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5 BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5" Hg (127 mm Hg)
 3. VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3 mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 4. ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 5. SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 6. DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 7. DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 8. USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

LENNTECH
info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

1	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2009/06/11	
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			 WAVE CYBER (SHANGHAI) CO., LTD.			
SIGNATURE						
	NAME	DATE	SCALE 1 : 5	MATERIAL	MODEL	
DESIGN					DESCRIPTION	
INSPECTION					13"(2.5-4) FRP PRESSURE	
APPROVAL					VESSEL	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			QUANTITY	SMOOTHNESS		
			PROJECTION 	COMPUTER CODE	DRAWING NO. 111130-00	VERSION NO. 1
			DO NOT MEASURE THE DIMENSIONS.		UNIT: MM	
					TOTAL PAGE: 1	