


MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
			mm	inch								
14x65	1674	65.91	6	.24	148	39.1	5.23	6.16	1.63	0.22	14.80	32.60
14x52	1340	52.76	6	.24	115	30.38	4.06	6.16	1.63	0.22	12.55	27.64
14x47	1194	47.01	6	.24	101	26.68	3.57	6.16	1.63	0.22	11.6	25.52



- NOTES:
- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - 6 . SURFACE FINISH.
 - 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 - 9 . USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

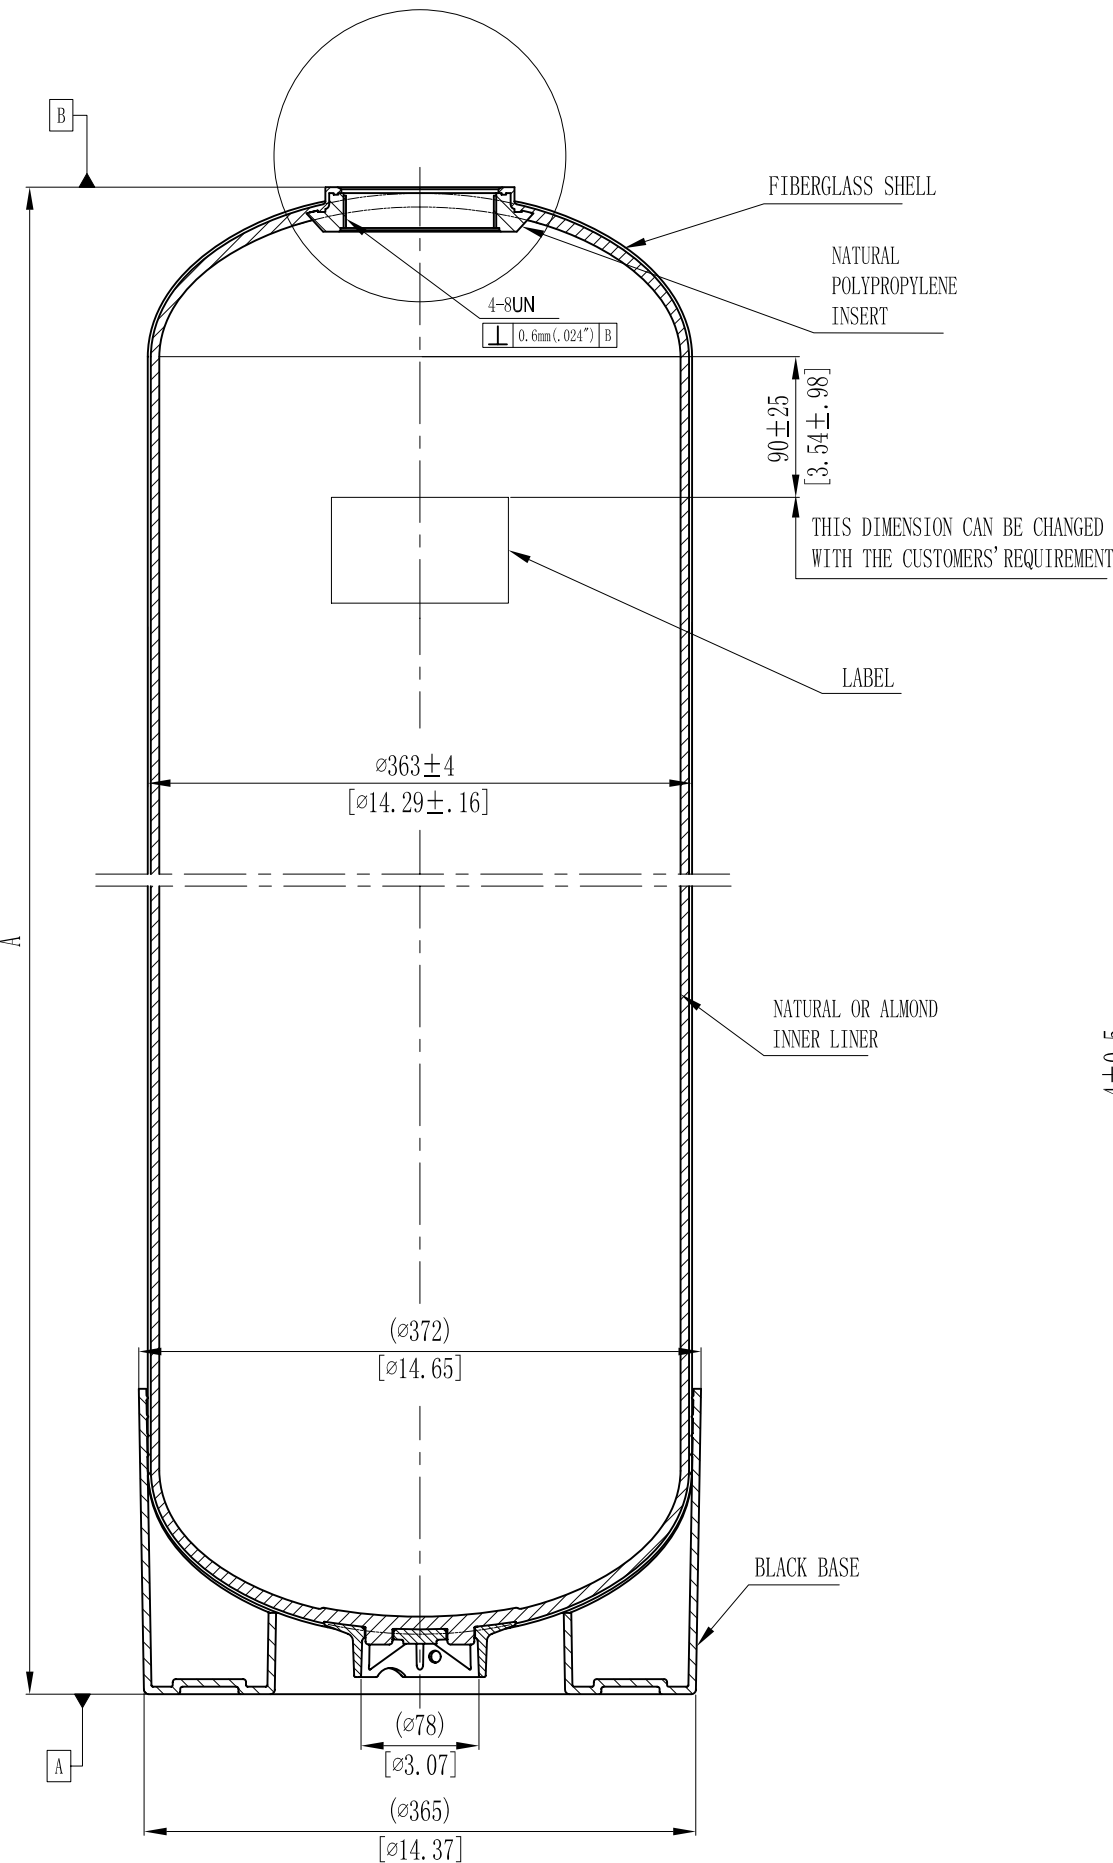

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

5	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2008/07/21	
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE	
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):		 WAVE CYBER (SHANGHAI) CO., LTD.				
SIGNATURE						
	NAME	DATE	SCALE	MATERIAL	MODEL	
DESIGN			1 : 5		DESCRIPTION	
INSPECTION					14" (4") FRP PRESSURE VESSEL	
APPROVAL			QUANTITY	SMOOTHNESS		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		PROJECTION	COMPUTER CODE	DRAWING NO.		VERSION NO.
				111142-00	5	
DO NOT MEASURE THE DIMENSIONS.			UNIT: MM		TOTAL PAGE: 1	