



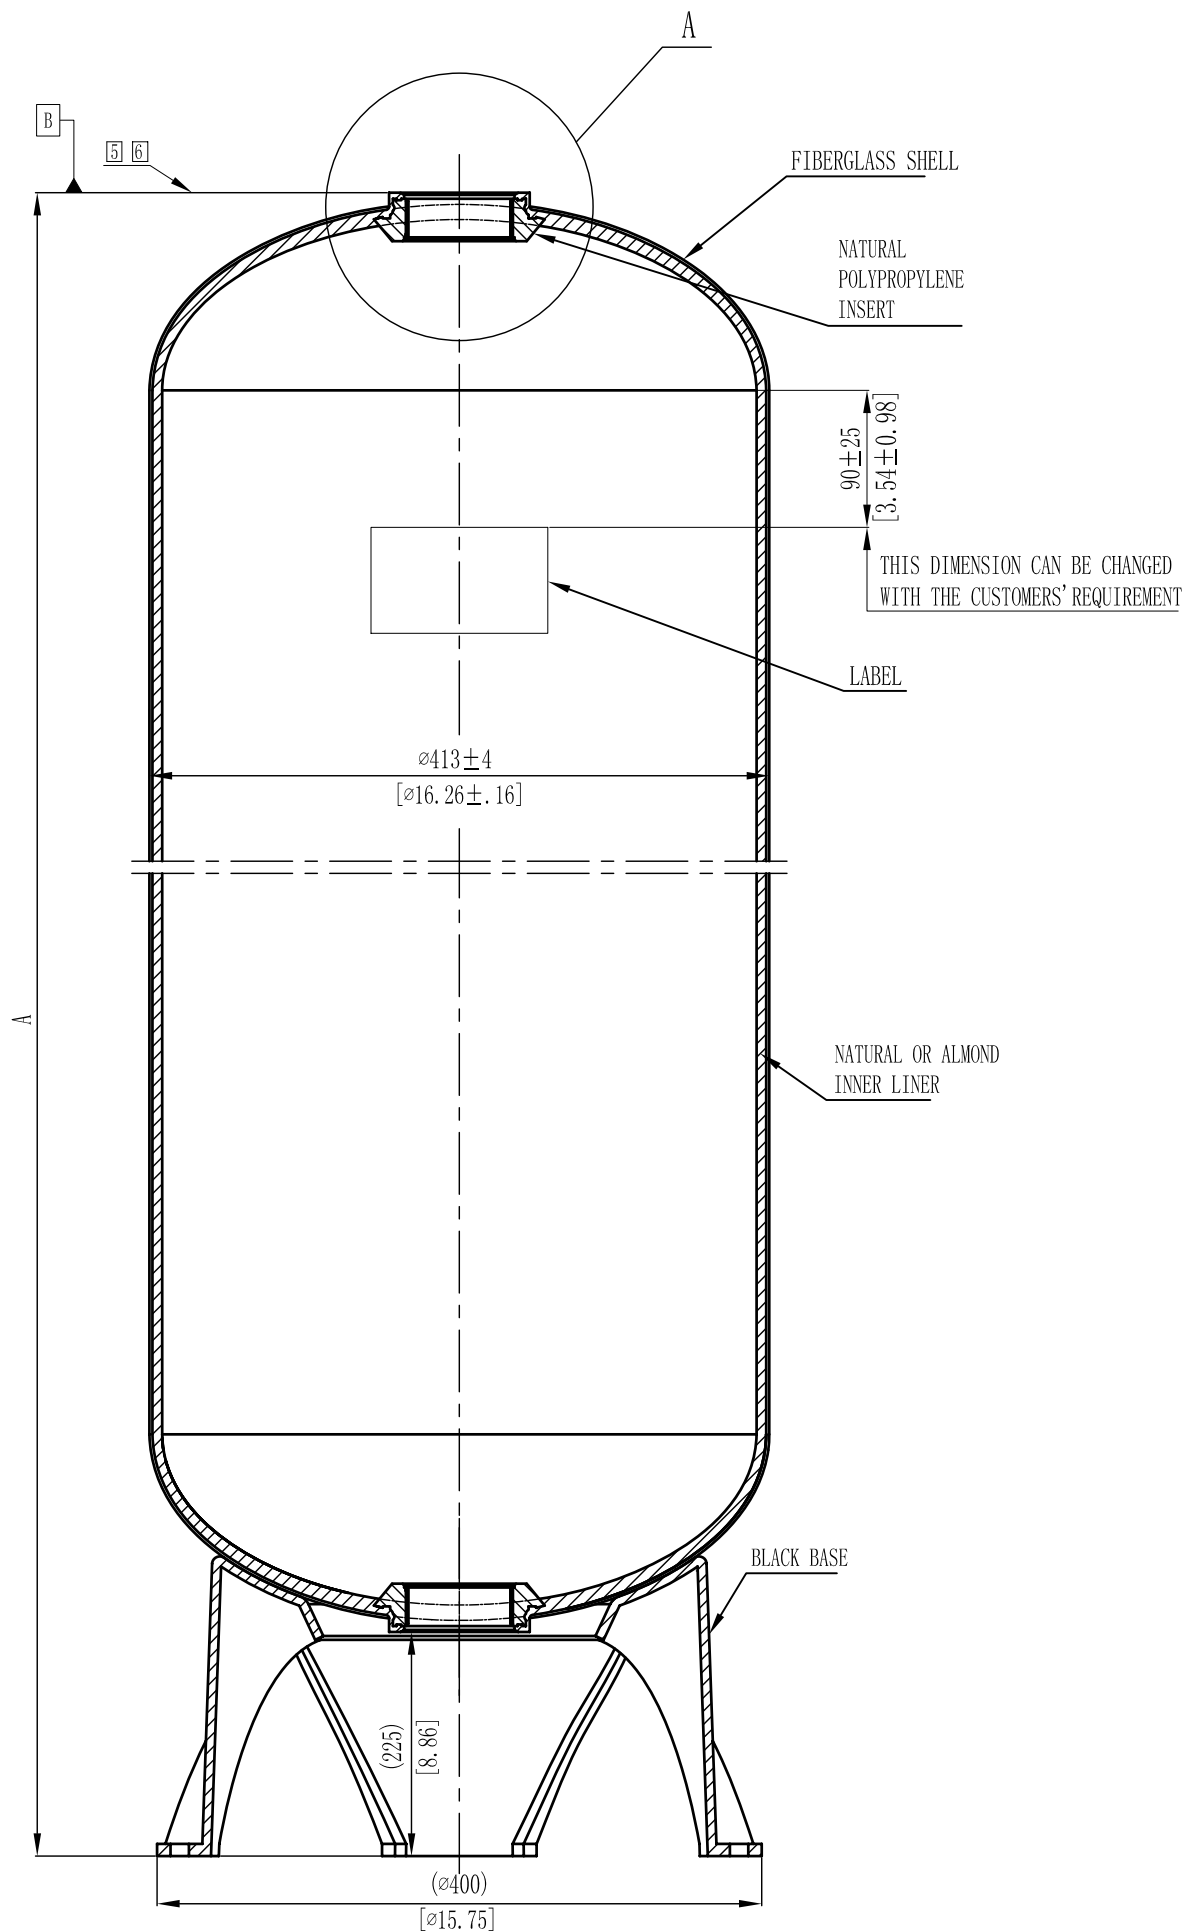

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S. gal	cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
16x52	1531	60.28	6	.24	153L	40.42	5.41	9.15	2.42	0.32	15.75	34.65
16x65	1861	73.27	6	.24	194L	51.25	6.86	9.15	2.42	0.32	18.65	41.03

Part A
1:2

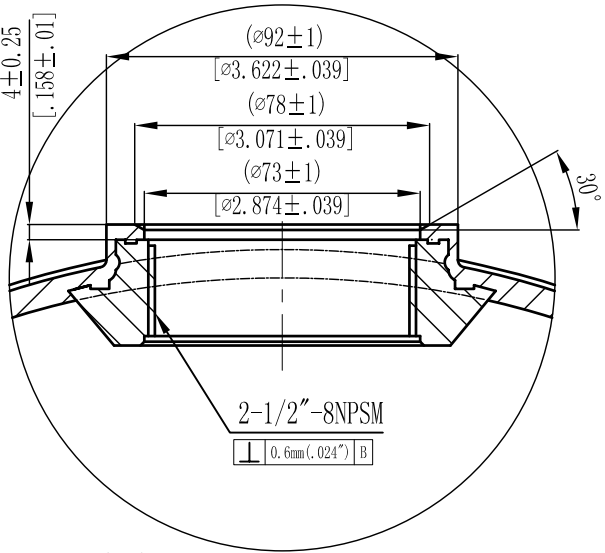

- NOTES:
- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - 6 . SURFACE FINISH.
 - 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 - 9 . USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

0	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2008/07/21	
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):						
SIGNATURE			WAVE CYBER (SHANGHAI) CO., LTD.			
	NAME	DATE				
DESIGN			SCALE	MATERIAL	MODEL	
INSPECTION			1 : 5		DESCRIPTION 16" (2.5-2.5) FRP PRESSURE VESSEL (DOUBLE OPENING)	
APPROVAL			QUANTITY	SMOOTHNESS		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.
					111166-00	0
DO NOT MEASURE THE DIMENSIONS.				UNIT: MM		TOTAL PAGE: 1